

The Interface of a flat head and a flexible tape

Sinan Müftü and Hans F Hinteregger

Massachusetts Institute of Technology

Haystack Observatory

Westford MA 01886

Phone: +1-978-692-4764, Fax: +1-781-981-0590

e-mail: [e- hhinteregger@haystack.mit.edu](mailto:ehinteregger@haystack.mit.edu)

Presented at the THIC Meeting at the Hilton Hotel

Virginia Beach VA 23451-3528

on October 12, 1999

The Premier Advanced Recording Technology Forum

THIC Inc.

The logo for THIC Inc. features the text "THIC Inc." in a bold, black, sans-serif font. The "THIC" part is set against a light brown, textured rectangular background, while "Inc." is on a white background. Below the text is a thick, dark brown horizontal bar.

The Interface of a Flat Head and a Flexible Tape

Sinan Müftü
and
Hans F. Hinteregger

Massachusetts Institute of Technology
Haystack Observatory
Westford, MA 01886

Flat-Head Configuration

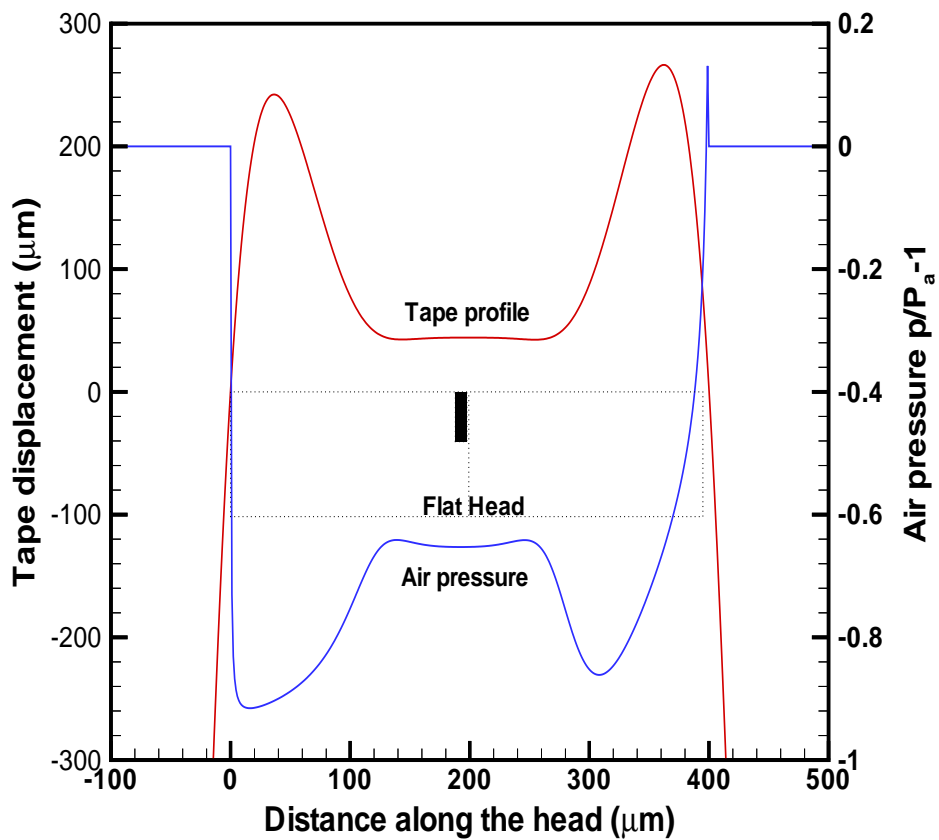
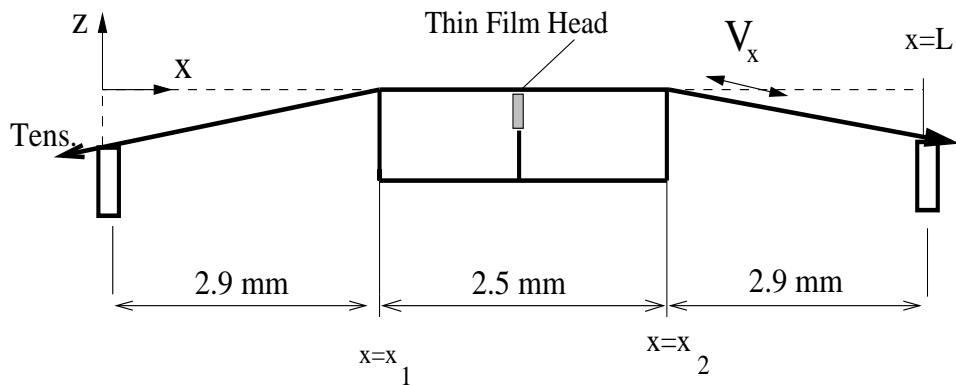


Figure 1: Equilibrium of a flat head with moving tape. Tape speed = 2.54 m/s (100ips), tape tension = 87 N/m (8oz/in), tape thickness = 12 μm .

Two Prototype Tested

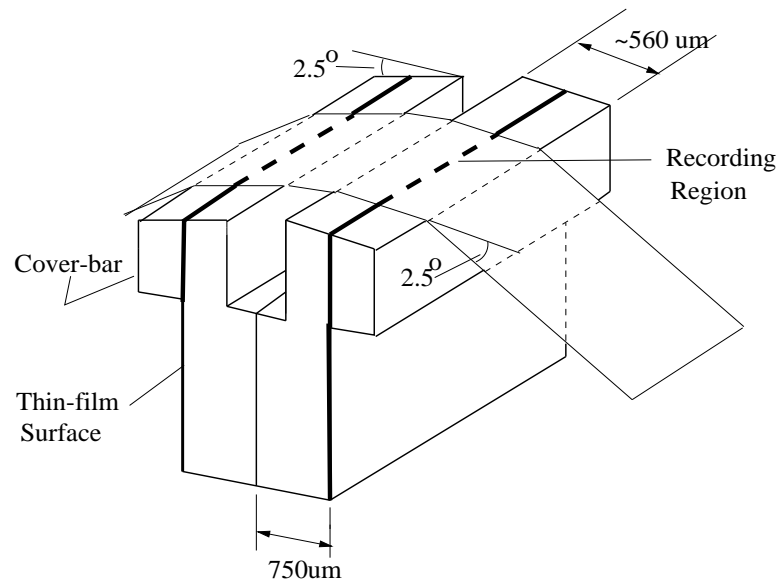


Figure 2: Dual-bar assembly


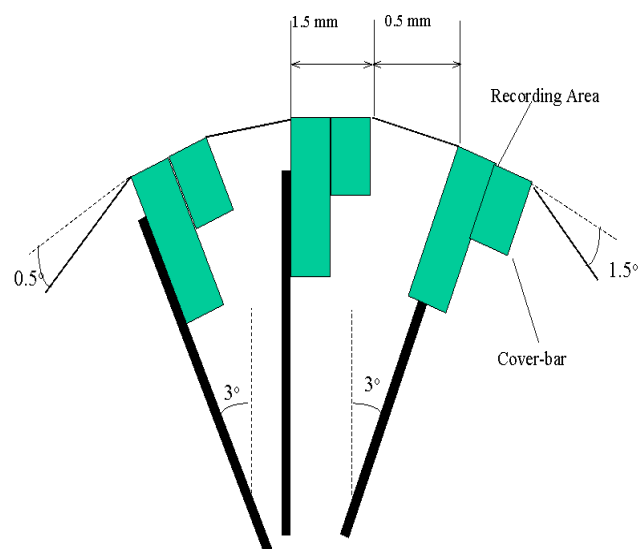


Figure 3: Triple-bar assembly

Dual-bar Assembly

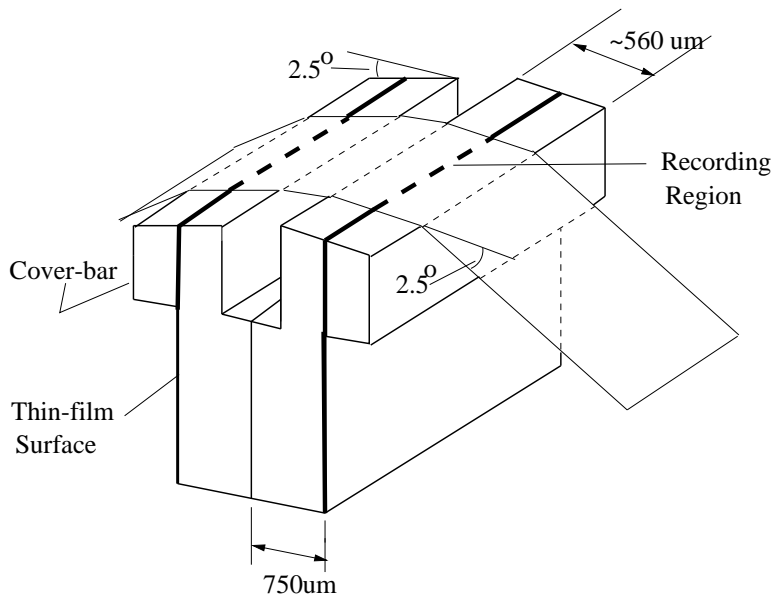

- Tape thickness = $15.6 \mu\text{m}$,
- Head width = $560 \mu\text{m}$,
- Wrap angle = 2.5° ,
- Tape width = 2.54 cm ,
- Tape speed = $0\text{-}8 \text{ m/s}$,
- Tape tension = 35 N/m

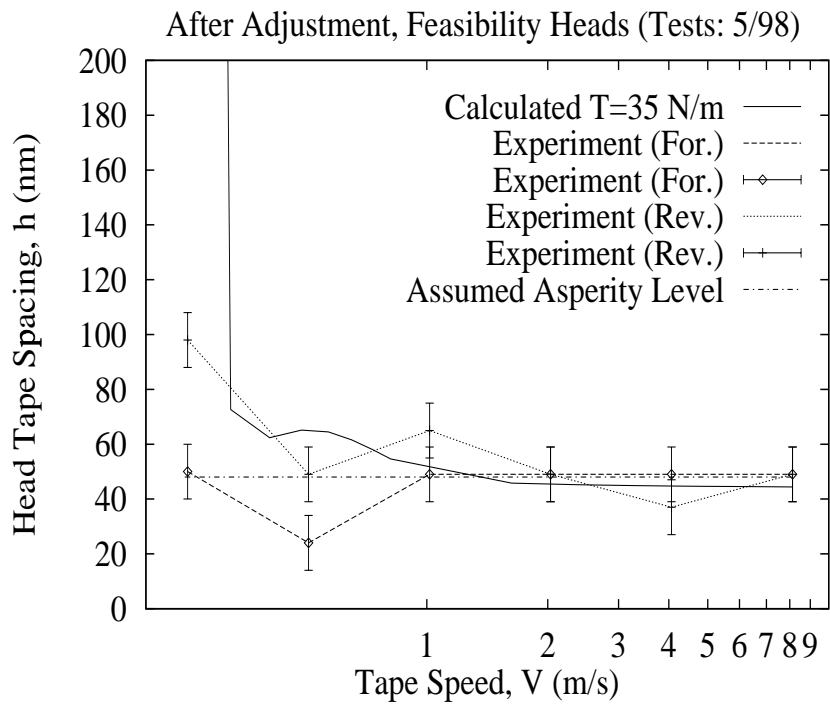


Figure 4: Dual-bar Assembly: Head-tape spacing based on the Wallace formula.

Calculated Head Displacements for the Dual-bar Assembly


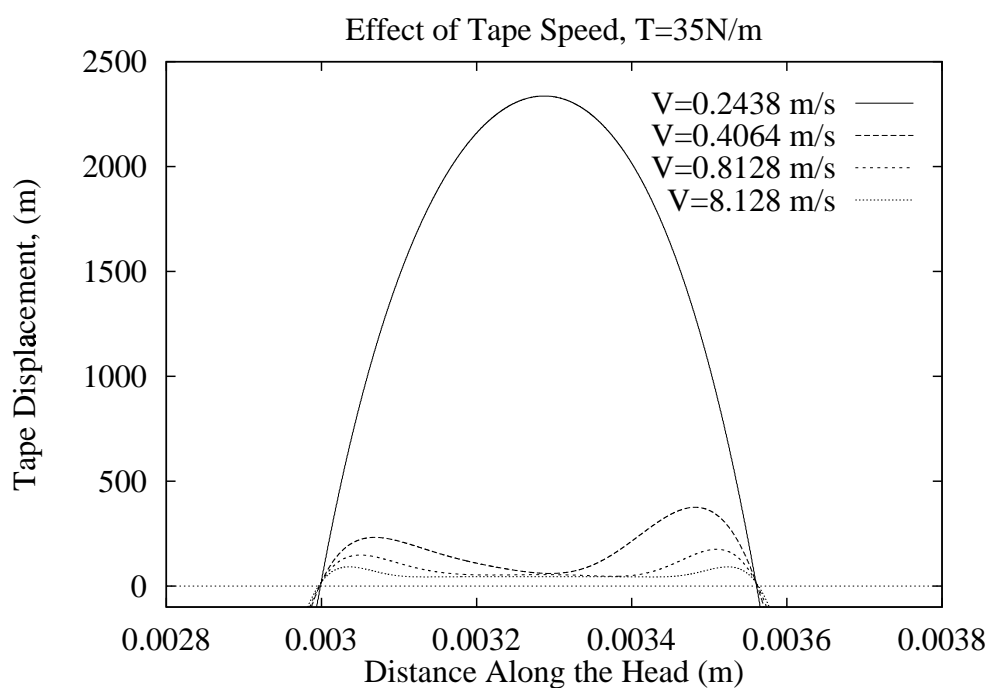


Figure 5: At the lower tension of 35 N/m it takes a considerably higher tape speed to "snap" the tape into contact. Shown are the tape speed of 0.24, 0.41, 0.81 and 8.1 m/s.

- The tape tends to take a "cupped" shape over the head at low speeds ($V < 0.23$ m/s.)
- As the tape speed is increased the "suction" generated under the tape causes the tape to deform toward the surface.

Triple-bar Assembly

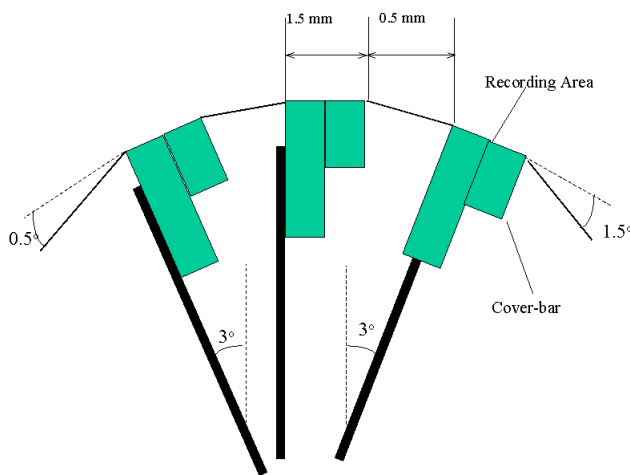

- Tape thickness = 15.6 μm ,
- Head width = 1.5 mm,
- Wrap angle = 1.5°,
- Tape width = 2.54 cm,
- Tape speed = 0-8 m/s,
- Tape tension = 43-87 N/m

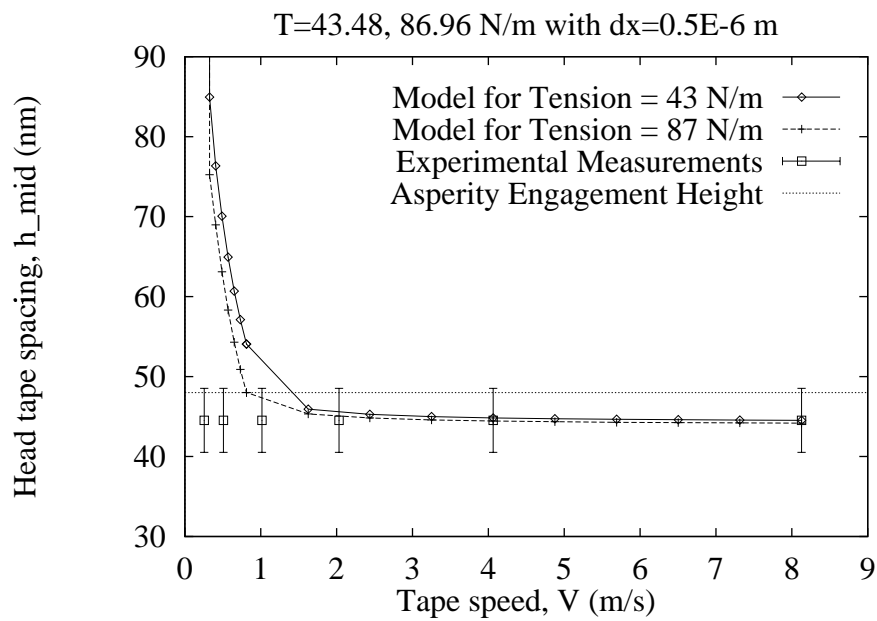


Figure 6: Triple-bar Assembly: Head-tape spacing based on the Wallace formula.

Calculated Head Displacements for the Triple-bar Assembly

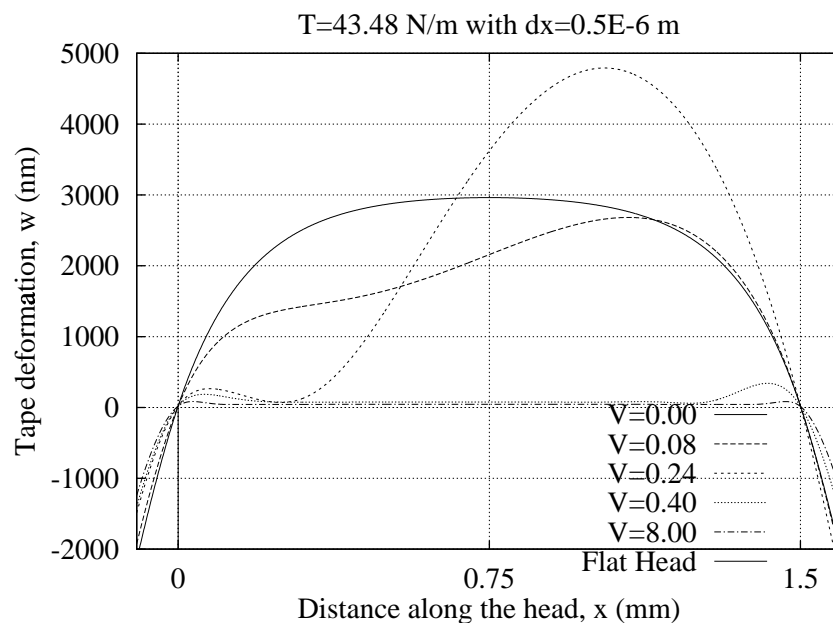




Figure 7: This figure shows the variation of head-tape spacing over the the flat island as a function of tape speed V for tape tension $T = 43 \text{ N/m}$ (5" H_2O vacuum) in the Metrum tape drive.

- The tape tends to take a “cupped” shape over the head at low speeds ($V < 0.24 \text{ m/s}$.)
- As the tape speed is increased the “suction” generated under the tape causes the tape to deform toward the surface.


Comparison of Measured and Calculated Head-Tape Spacing

Measurements by Donna J. Kaiser, Quantum, Shrewsbury, MA
Using the Tape Spacing Analyzer, MicroPhysics, Inc.

Wrap Angle = 4°, V = 100 ips (2.54 m/s), c = 12 μm

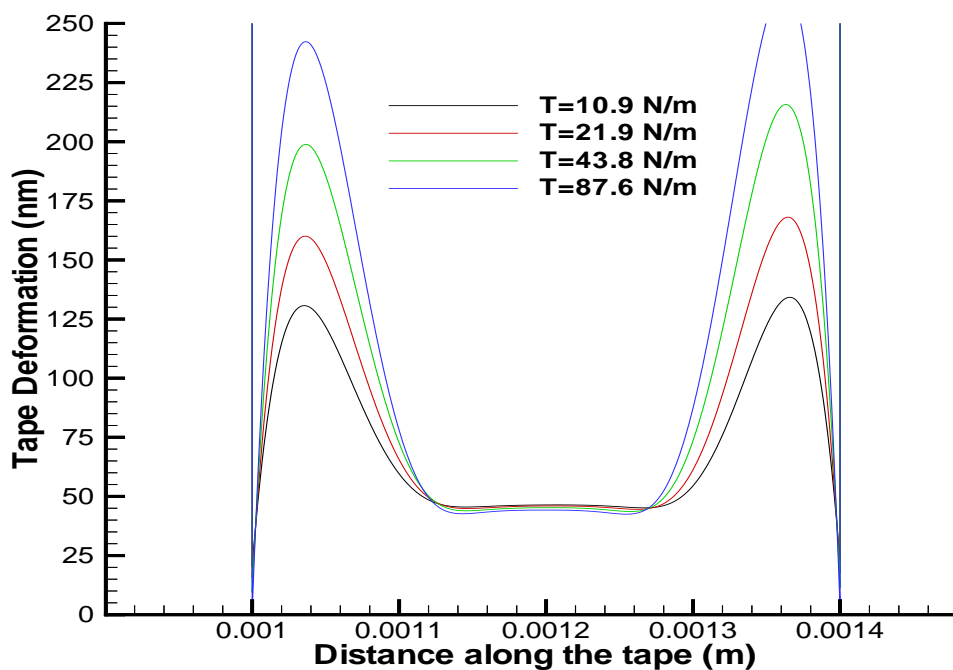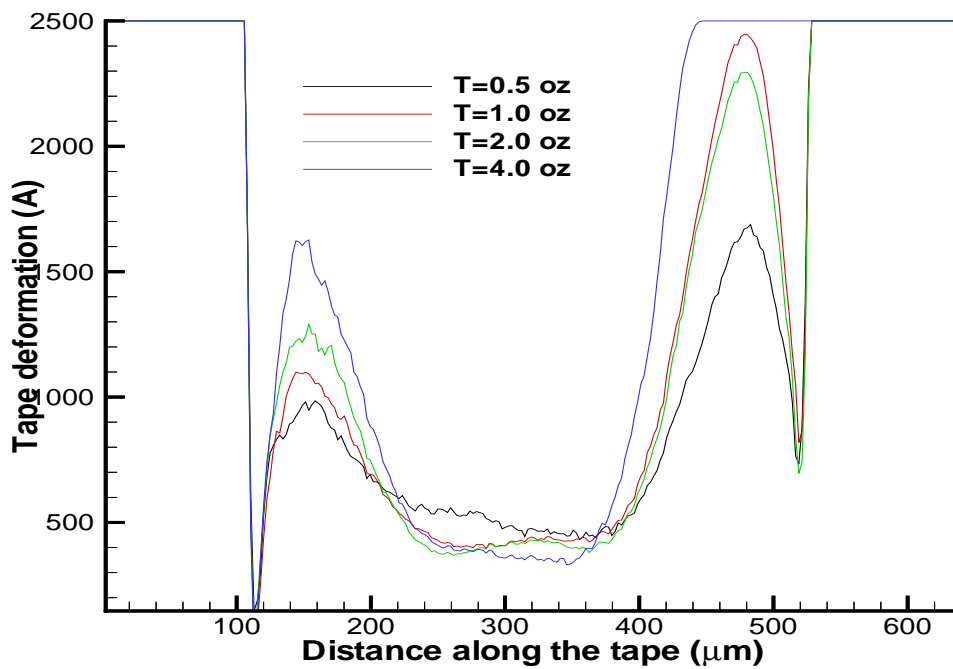

Head Wear Test

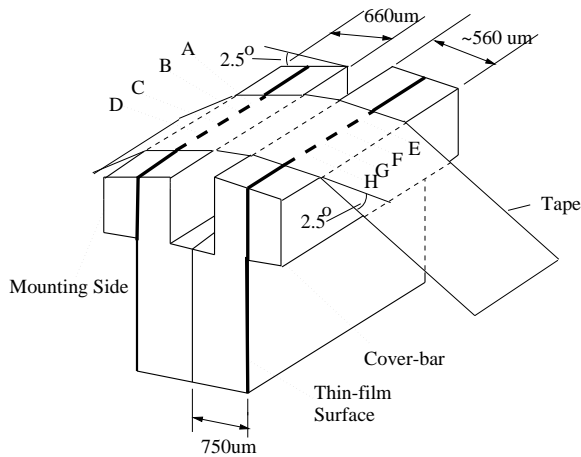

- Tape thickness = 15.6 μm ,
- Head width = 0.56 mm,
- Wrap angle = 2.5 $^\circ$,
- Tape width = 2.54 cm,
- Tape speed = 6.9 m/s,
- Tape tension = 87 N/m,
- Relative Humidity = 20%,
- Time = 552 + 600 hours

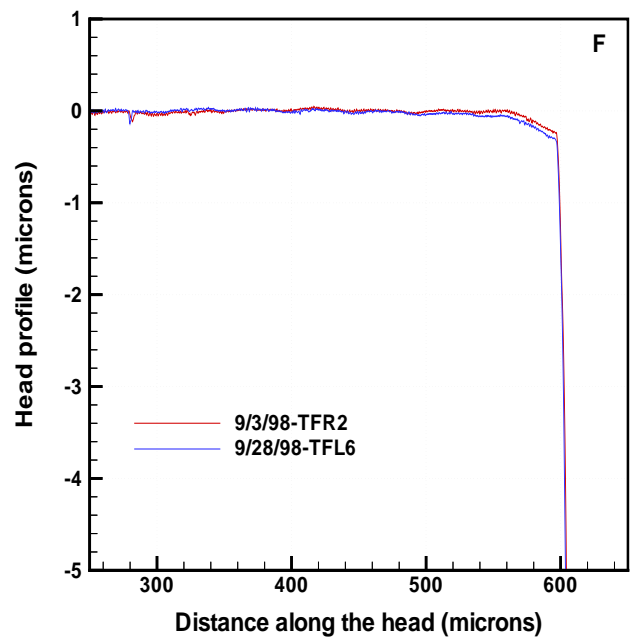
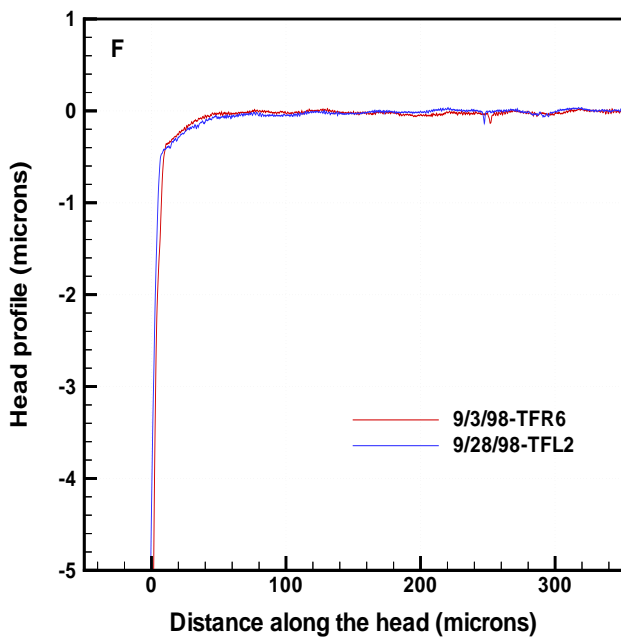


Figure 8: Figure showing the scans of the heads after 552 and additional 600 hours of tape shuttling. Note that the profiles are virtually the same, indicating negligible wear in the 600 hours of shuttling at low humidity.

Model of the Head-Tape Interface

Tape Eqn.: $r_t = D \frac{d^4 w}{dx^4} + (\rho_a V_x^2 - T_x) \frac{d^2 w}{dx^2} - (p - P_a) - P_c = 0$ (a)

Reyn. Eqn.: $r_p = \frac{d}{dx} [p h^3 \frac{dp}{dx} (1 + 6 \frac{\lambda_a}{h})] - 6 \mu V_x \frac{d(ph)}{dx} = 0$ (b)


Contact P.: $P_c = \frac{P_{max}}{\sigma_t^2} (h - \sigma_t)^2 [1 - H(h - \sigma_t)]$ (c)

Spacing: $h = w + \delta$ (d)

Disp. BC: $w = -w_1, \frac{d^2 w}{dx^2} = 0$ at $x = 0, L_x$ (e)

Pressure BC: $P = P_a$ at $x = L_1, L_2$ (g)

Coordinates for Head-Tape Interface Model

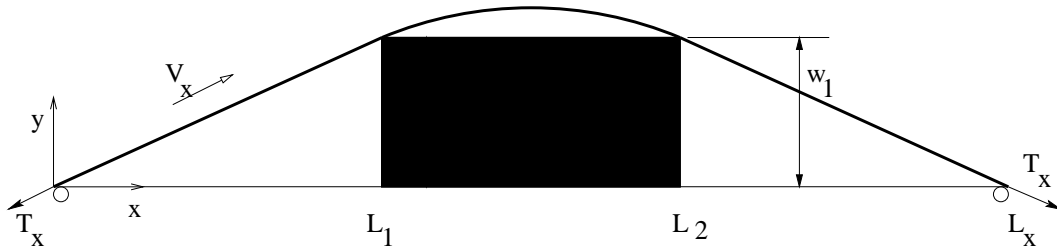


Nomenclature

x	Coordinate axis	P_c	Contact pressure
w	Tape displacement	$P_{max} = 10MPa$	Contact pressure at $h = 0$
h	Head-tape spacing is	$\sigma_t = 48nm$	Asperity engagement height
$D (= \frac{Ec^3}{12(1-\nu^2)})$	Bending stiffness	H	Heaviside step function
T_x	Tape tension	$E (= 4GPa)$	Modulus of elasticity
V_x	Tape speed	$\nu (= 0.3)$	Poisson's ratio
p	Air pressure	$c (= 15\mu m)$	Tape thickness
$P_a (= 101.3kPa)$	Ambient pressure	w_1	Tape disp., $x = 0, L_x$
$\lambda_a (= 63.5nm)$	Molecular mean-free path	r_t, r_p	Residuals
$\mu (= 18.5\mu Nsm^{-2})$	Air viscosity		


Summary and Conclusions

- The flat-head concept is tested with dual and triple-bar assemblies.
- Head-tape spacing measurements were performed using read-signal measurements and optical spacing analyzer.
- The contact at the head-tape interface is shown to be as robust as predicted by theory.
 - The TSA results indicate existence of air suction.
- No detectable wear was observed after 1000+ hours of tape shuttling.
- Read-signal measurements indicate an unidentified noise source currently attributed to frictional heating.


Tape Wrap Configurations

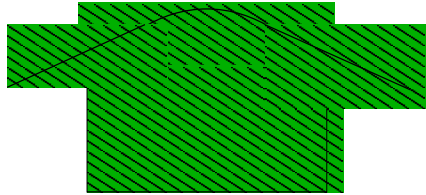

Under-wrapped: Air entrainment problem

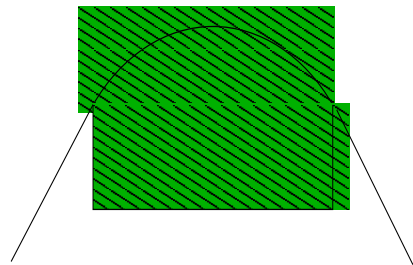

Over-wrapped: Good for reducing air entrainment
"Stepped-Head"



Too-much over-wrap: Tape may "cup" over the head



Flat Head: Air entrainment creates a self-acting negative air-bearing