

Overview of Optical Data Storage Technology

Koichi Sadashige

Sadashige Associates

15 Amherst Rd, Voorhees NJ 08043-4901

Phone: +1-856-767-2644, FAX: +1-856-767-1462

E-mail: mm306@msn.com

**Presented at the THIC Meeting at the Hilton San
Diego/Del Mar**

Del Mar CA 92014-1901

on January 22, 2002


Overview of Optical Data Storage Technology

- Technology Basics
- Recording Process
 - Mass Replicated Read Only Memory, ROM
 - Organic Dye Decomposition, WORM
 - Magneto-optical recording
 - Phase Change recording
- Future Outlook
 - Road to 100 GB+ disc
- True Measure of Storage Density/Efficiency

Optical Data Storage Technology

Reading Data by Laser Beam

- Recording process produces physical, chemical and/or magnetic changes in or on the recording medium
- Reading laser beam, its characteristics changed as it is reflected off the medium surface, is collected by the data detection system
- Detector produces data signal output by comparing the characteristics of the beam returned from the recorded area (**pit**) and the beam returned from the non-recorded area (**land**)

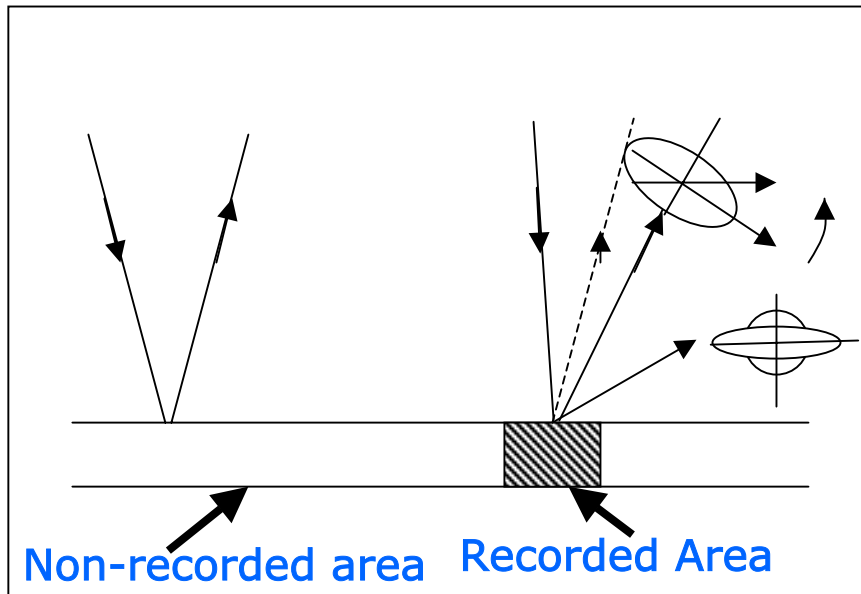

Return Beam Characteristics Change

1. Greatly reduced intensity
2. Polarized Plane Angle Shift
3. Beam cross-section ellipticity change

Technology and Applications (contd)


Recording Process	Data Recovery	Application	Products
Record-Erase-Record (Phase Change)			
<ul style="list-style-type: none">•Thermally reversible crystalline-amorphous phase change on chalcogen alloy•Amorphous (recorded) area returns less light	Return beam intensity difference detection	General Purpose data storage	DVD-RAM DVD-RW

Technology and Applications (contd)

Record-Erase-Record (Magneto-optics)

Recording Process	Data Recovery	Application	Products
<ul style="list-style-type: none">•Thermally assisted magnetic recording•Use polarized light for reading	Return beam polarization angle shift	General purpose data storage	ISO standardized 3.5", 5.25" MO drive ID-Photo

Typical System Configuration

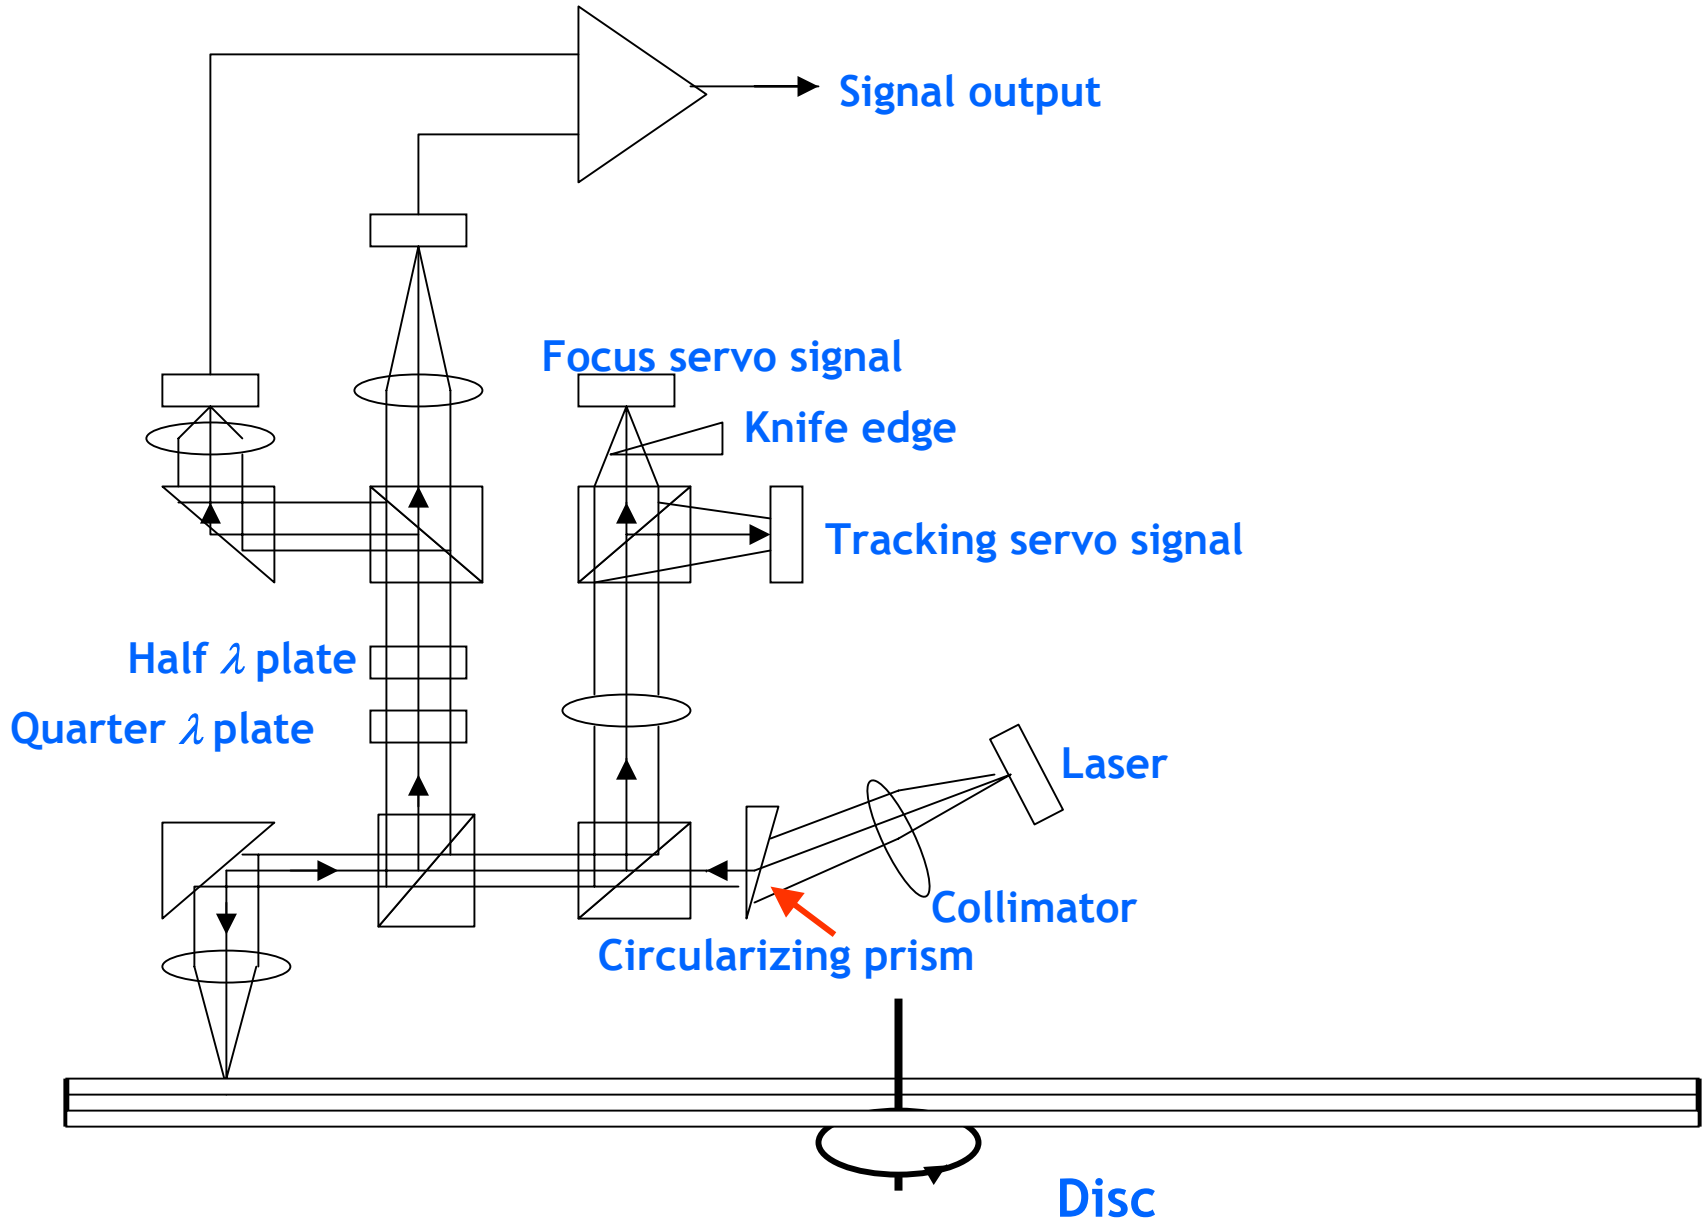

Areal Recording Density

d = beam spot diameter

D = Effective lens diameter (aperture)

F = Focal Length of Lens

λ = laser wavelength

ρ = laser beam energy distribution profile


NA = Numerical aperture = $\sin \theta$

$d = \rho\lambda/NA$


Minimum mark length = d

Track pitch = $2d$

Area/bit = Track pitch X 2 mark length
= $(2d)^2$

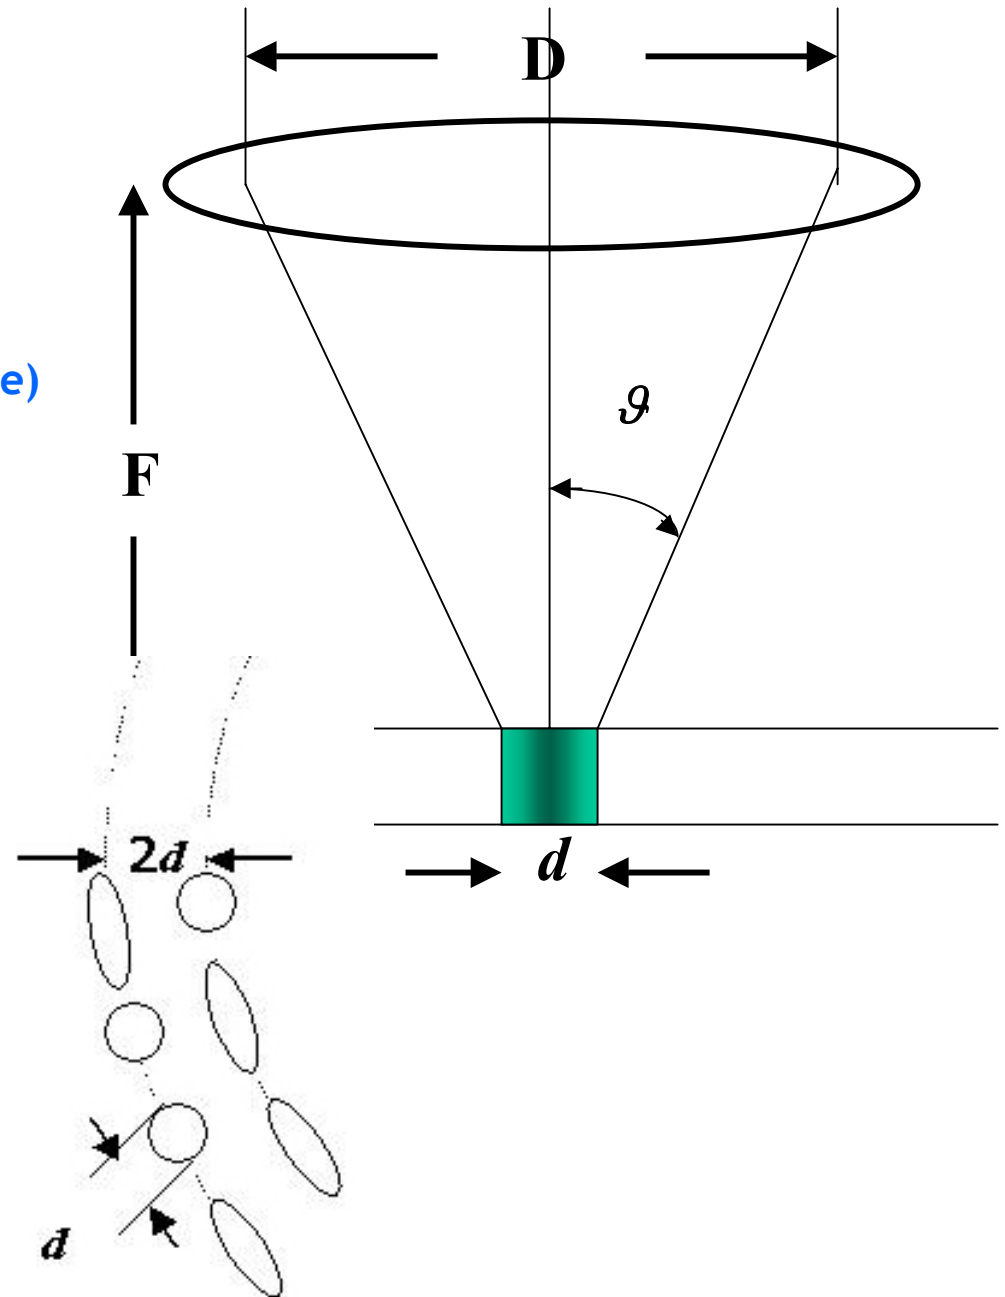


Data Recovery by Return Beam Intensity

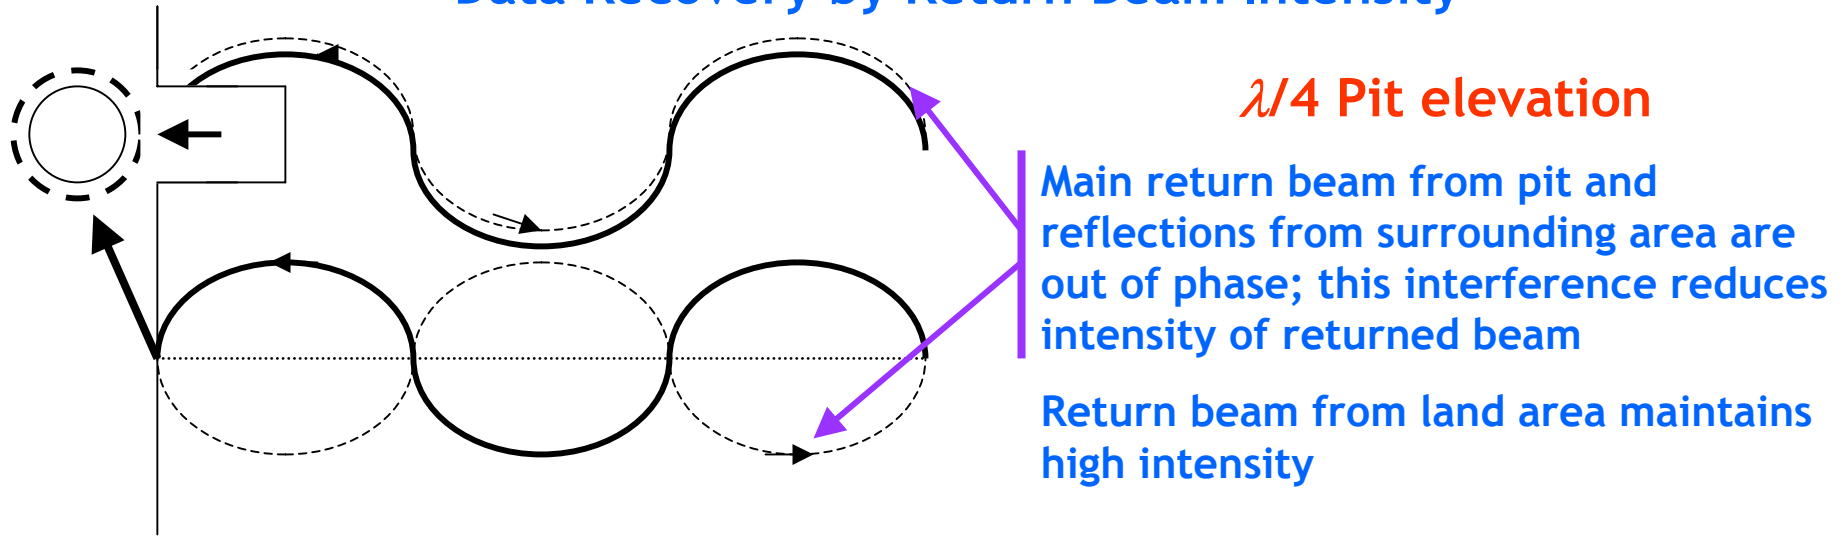

High reflectivity of crystalline phase in no-recorded area (land)

Low reflectivity of amorphous phase recorded area (pit)

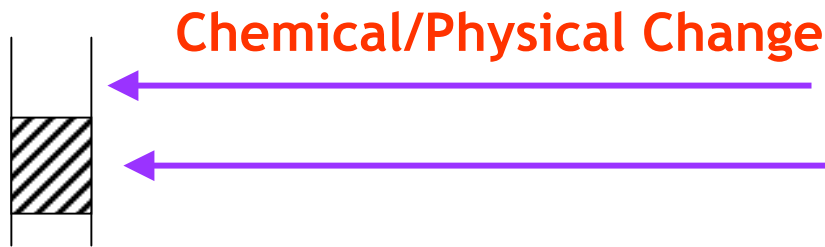


High reflectivity of organic polymer dye

Low reflectivity of recorded (thermally induced chemical change) area


Data Recovery by Return Beam Optical Characteristics


Polarized Beam Plane Angle Shift (Kerr Effect)

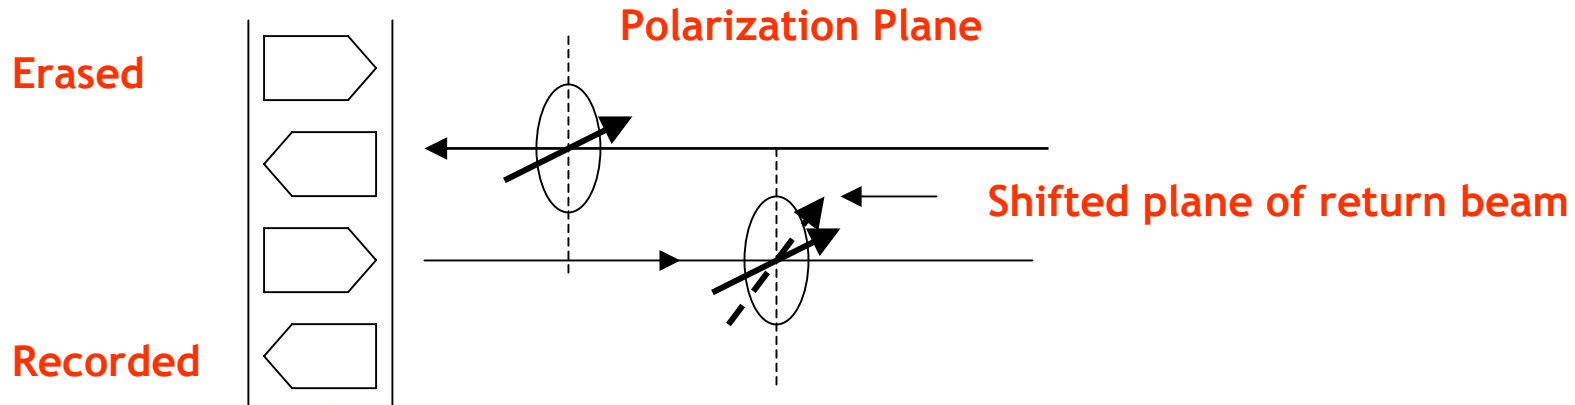


Magnetic Recording Layer

Return Beam Ellipticity Change

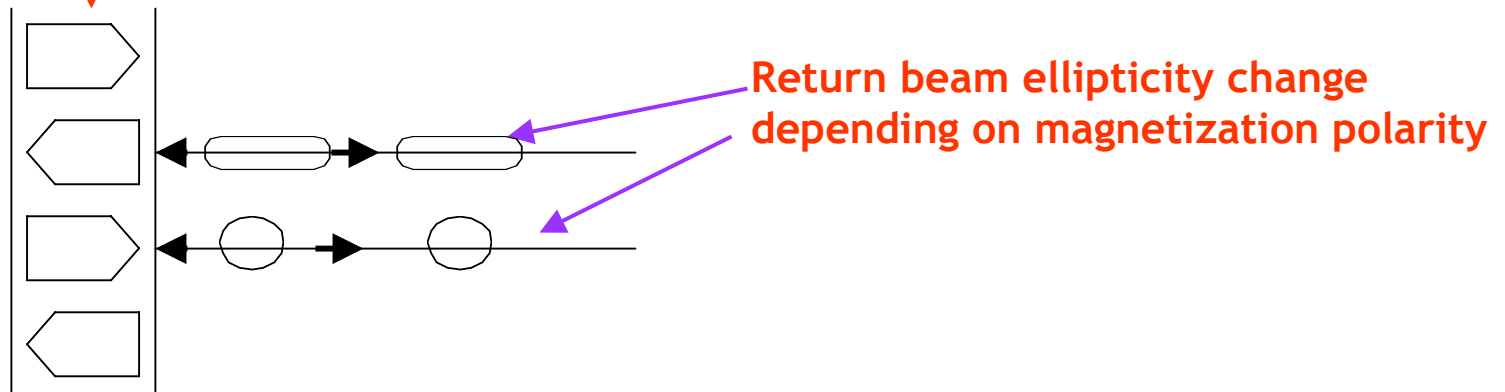

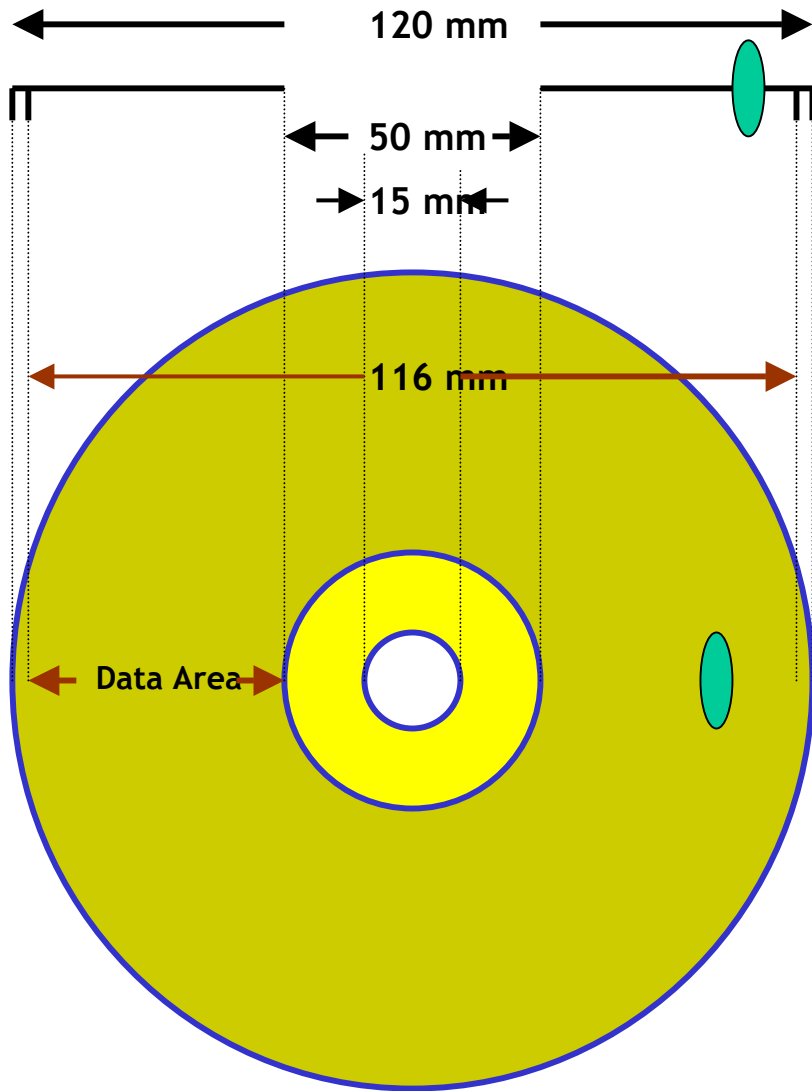


Structure of Compact Disc

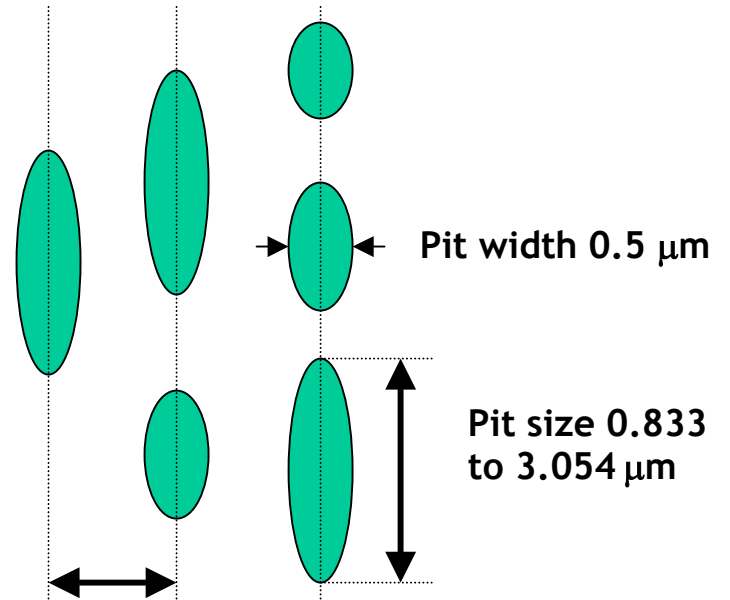


Track pitch 1.6 μm

Compact Disc Structure

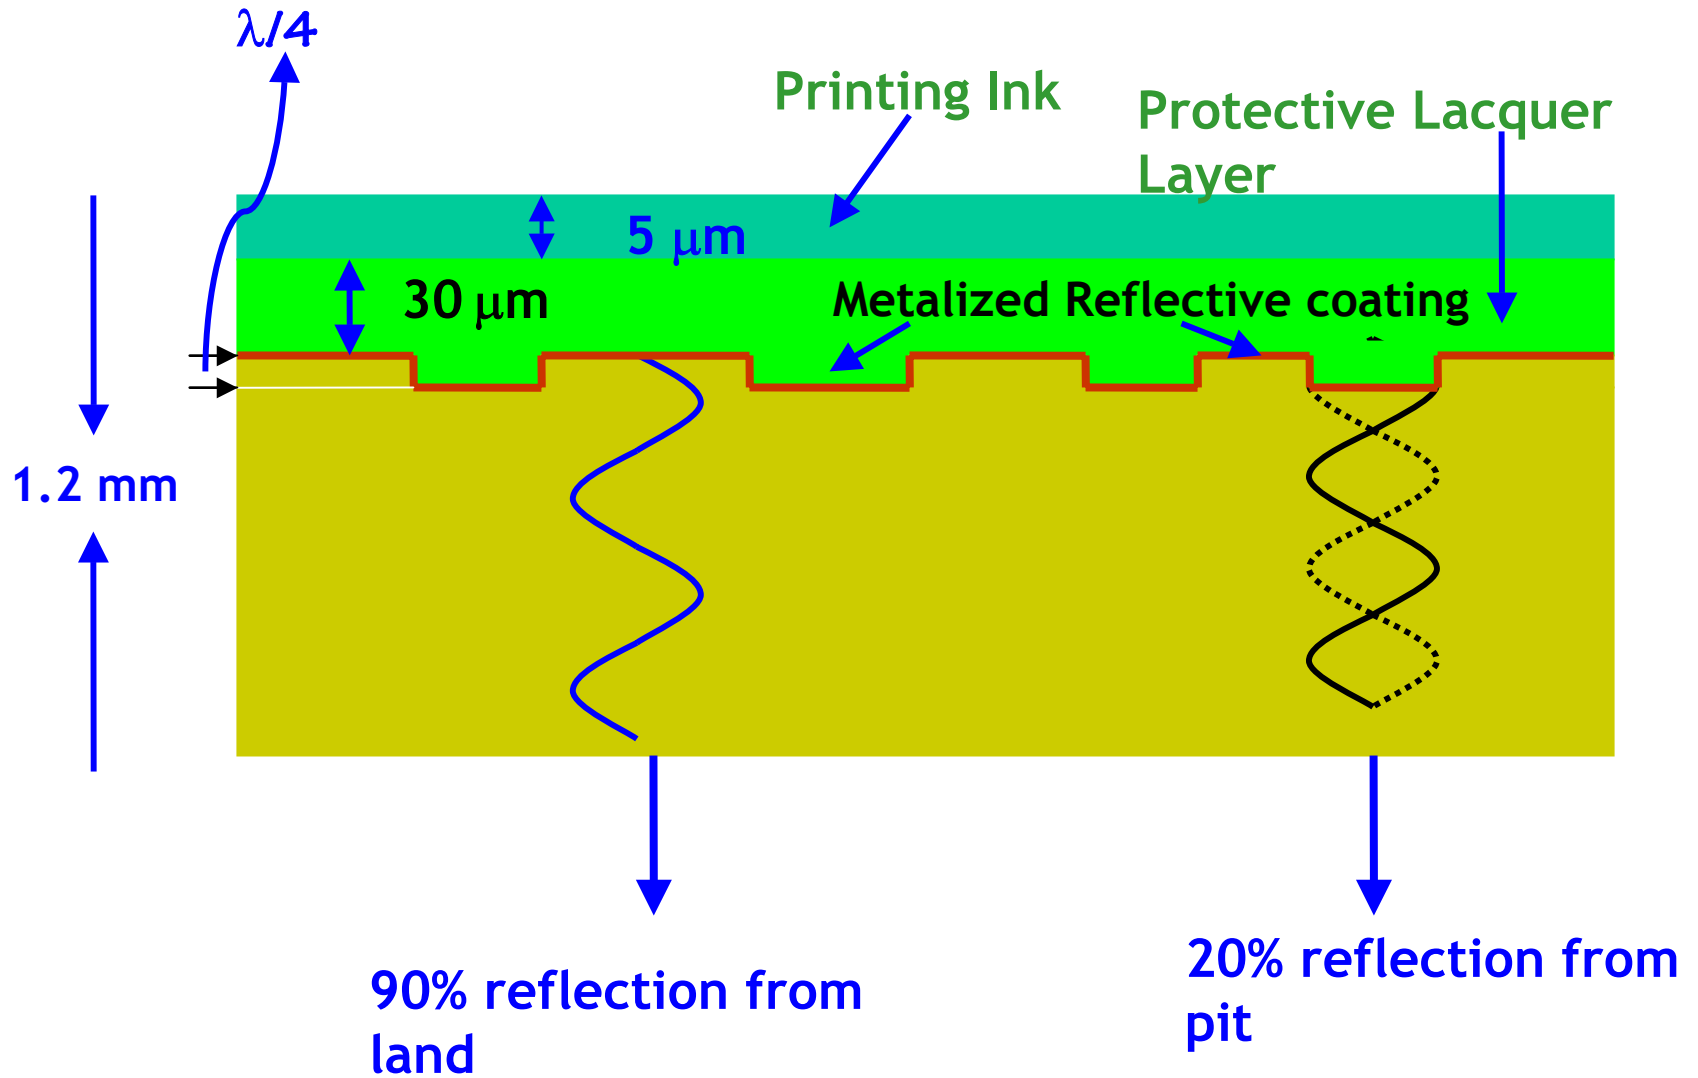

Organic Dye Decomposition Recording

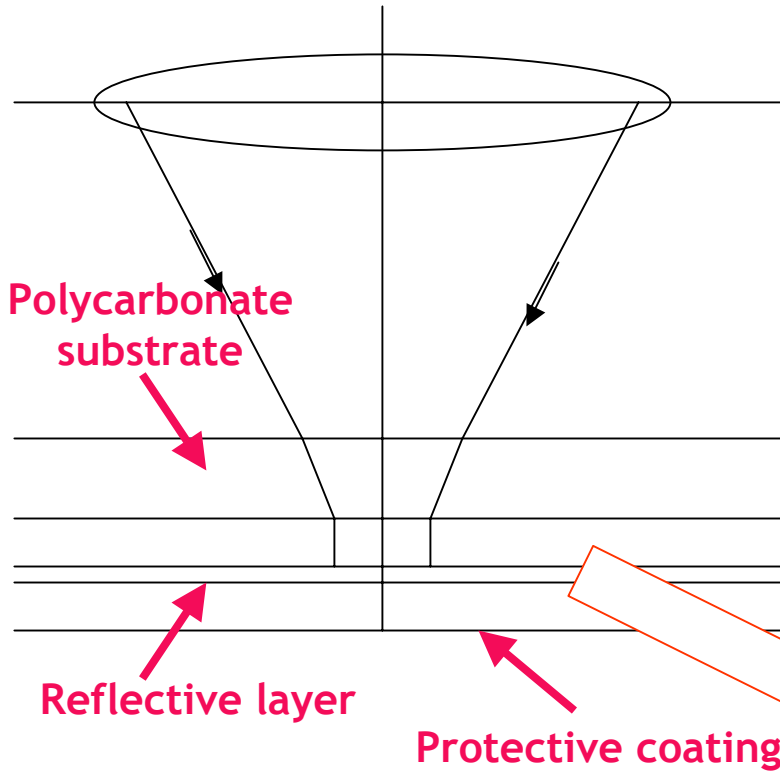

Recording layer, $1/2\lambda$ thick


Phthalocyanine, cyanine, azo, etc

High light transparency before recording


Becomes near opaque after recording

Polycarbonate substrate absorbs heat generated in recording layer, forming light-absorbing substance approximately $1/4 \lambda$ thick

Heat concentrated in illuminated area due to poor lateral heat conductivity of recording layer and heat reflected from metallic reflective layer

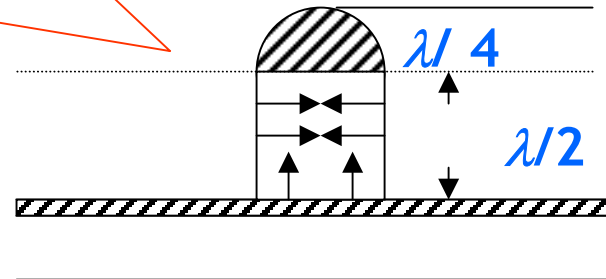


Return Beam Intensity Modulation - Complex Technique

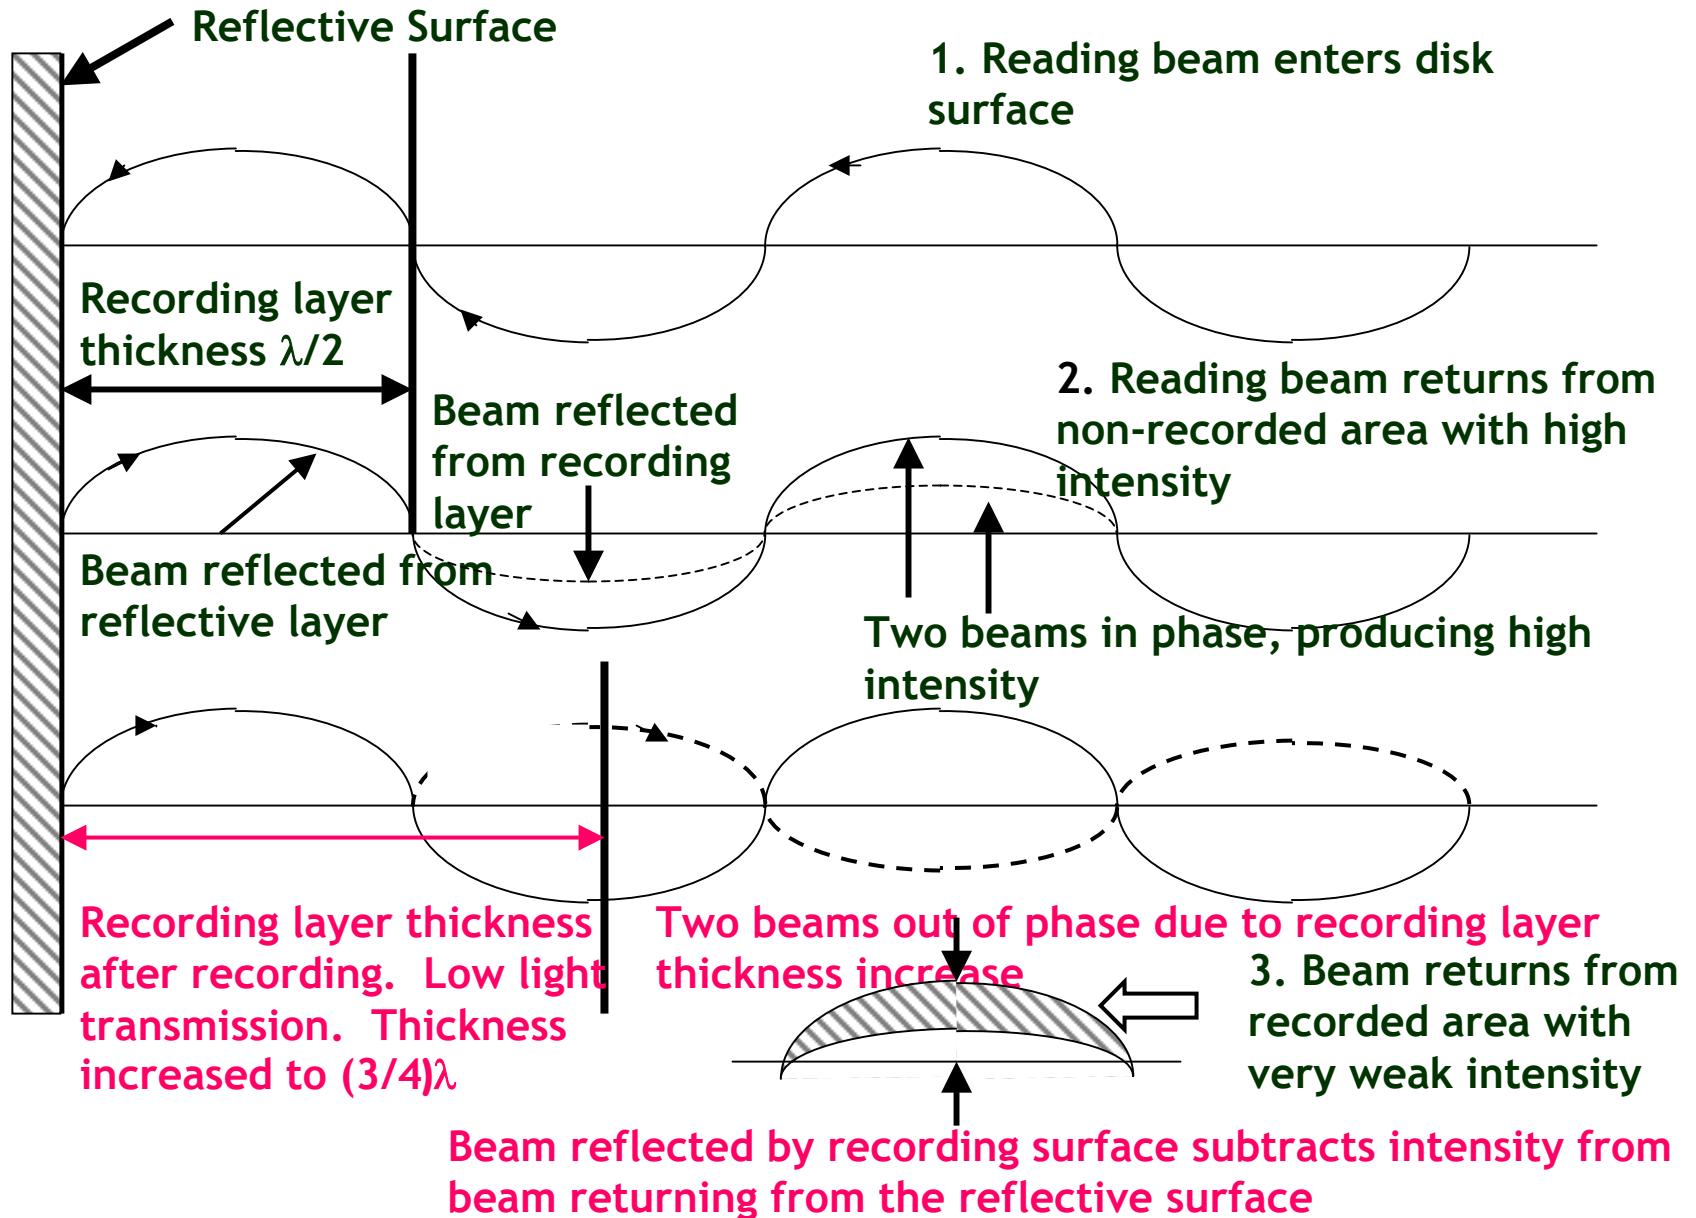

Magneto-optical Recording


Erase

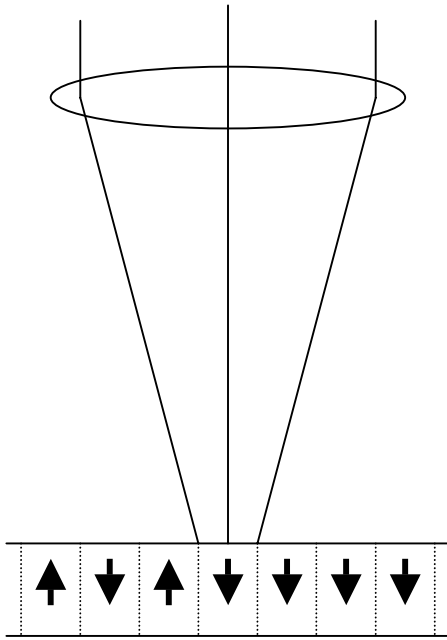

Laser Continuously ON

Magnetic Continuously ON
Field


Conventional M-O
Recording

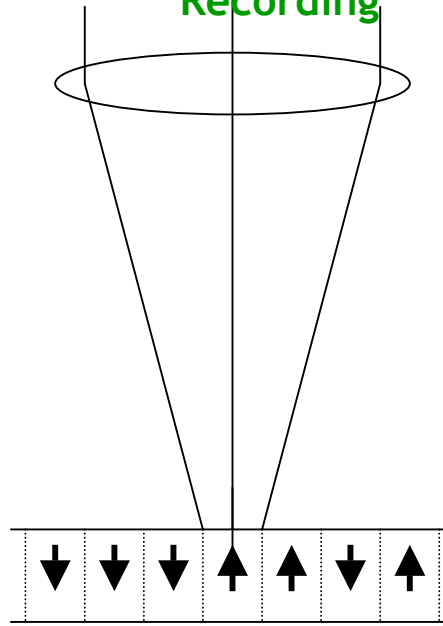

ON/OFF controlled
by recording data

Continuously ON

Thermally assisted
Magnetic Recording

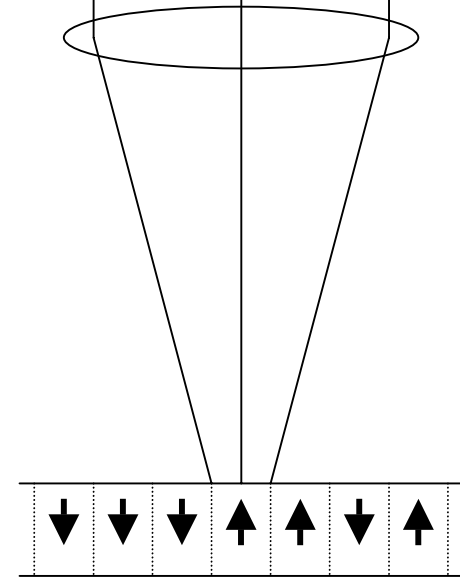


Continuously ON

ON/OFF controlled by
recording data(Note)

Note: Perpendicular magnetic recording head placed in close proximity (10-20 μm) to recording layer

Magneto-optical recording - Compensation point writing

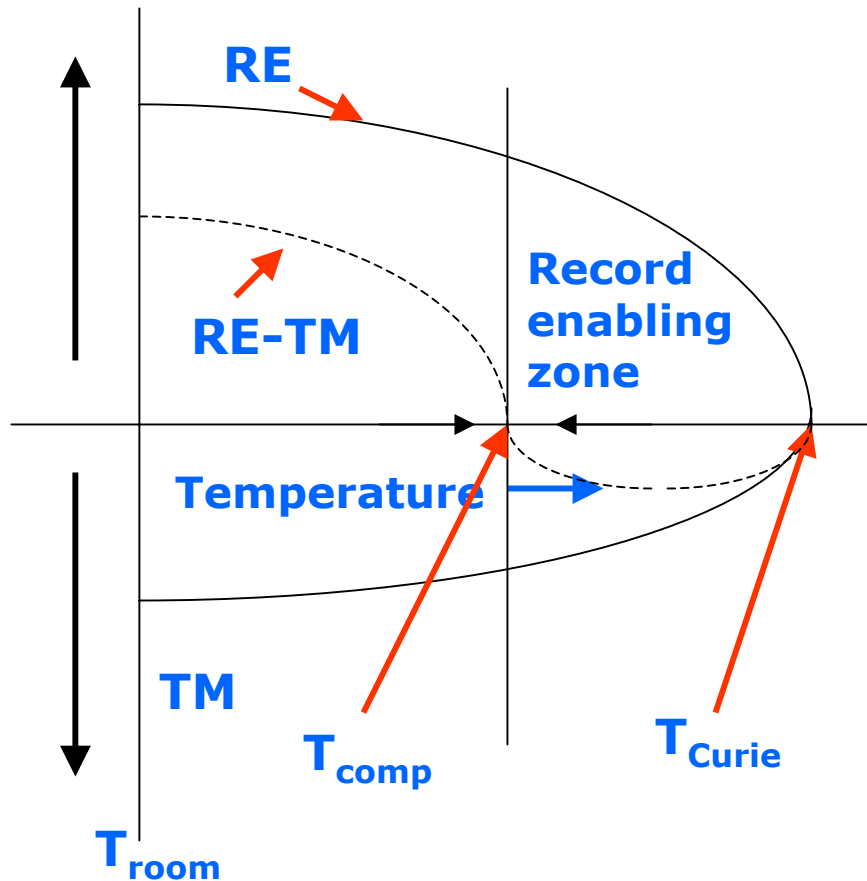

- Ferrimagnetic recording layer
- Ferrimagnetic material composed of: RE (rare earth material)
TM (Transition Metal)
- T_{comp} = compensation temperature where net magnetization from RE and TM approaches zero
- T_{curie} = Curie temperature

Magneto-optical Recording - Use of Laser as Heat source

- laser power focused on recording layer elevates its temperature to near compensation point where coercivity is very low
- Weak magnetic field placed below recording medium reverses polarity of recording layer magnetization

Data Recovery Technique

Magnetization direction reversed by recording
Returned beam polarization plane rotated

Direction of Recording



Pre-erased track magnetized to one direction

Returned beam polarization plane unchanged

Polarization Plane Angle Rotation, Kerr Effects

- Angle of rotation depends on reading laser wavelength and composition of recording layer
- Round trip return increases rotation
- Differential Signal detection technique used to improve recovered signal S/N

Gaussian Power distribution of focused beam

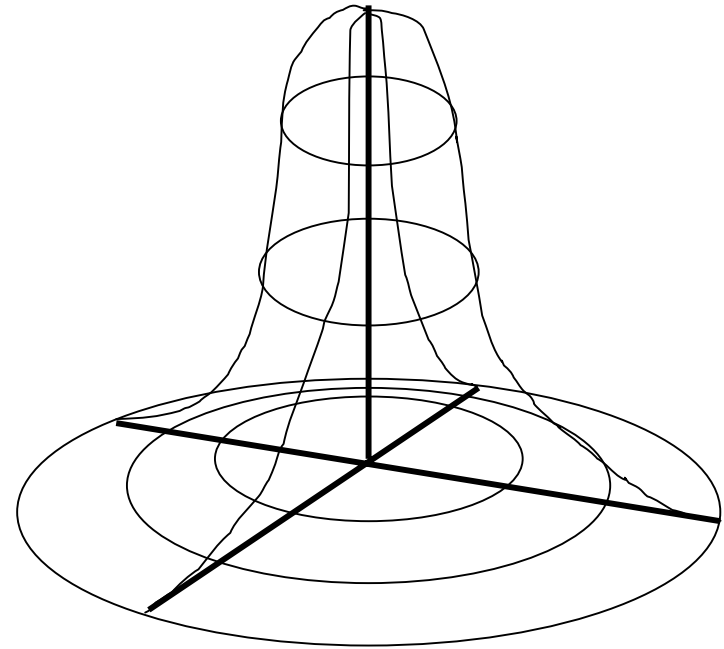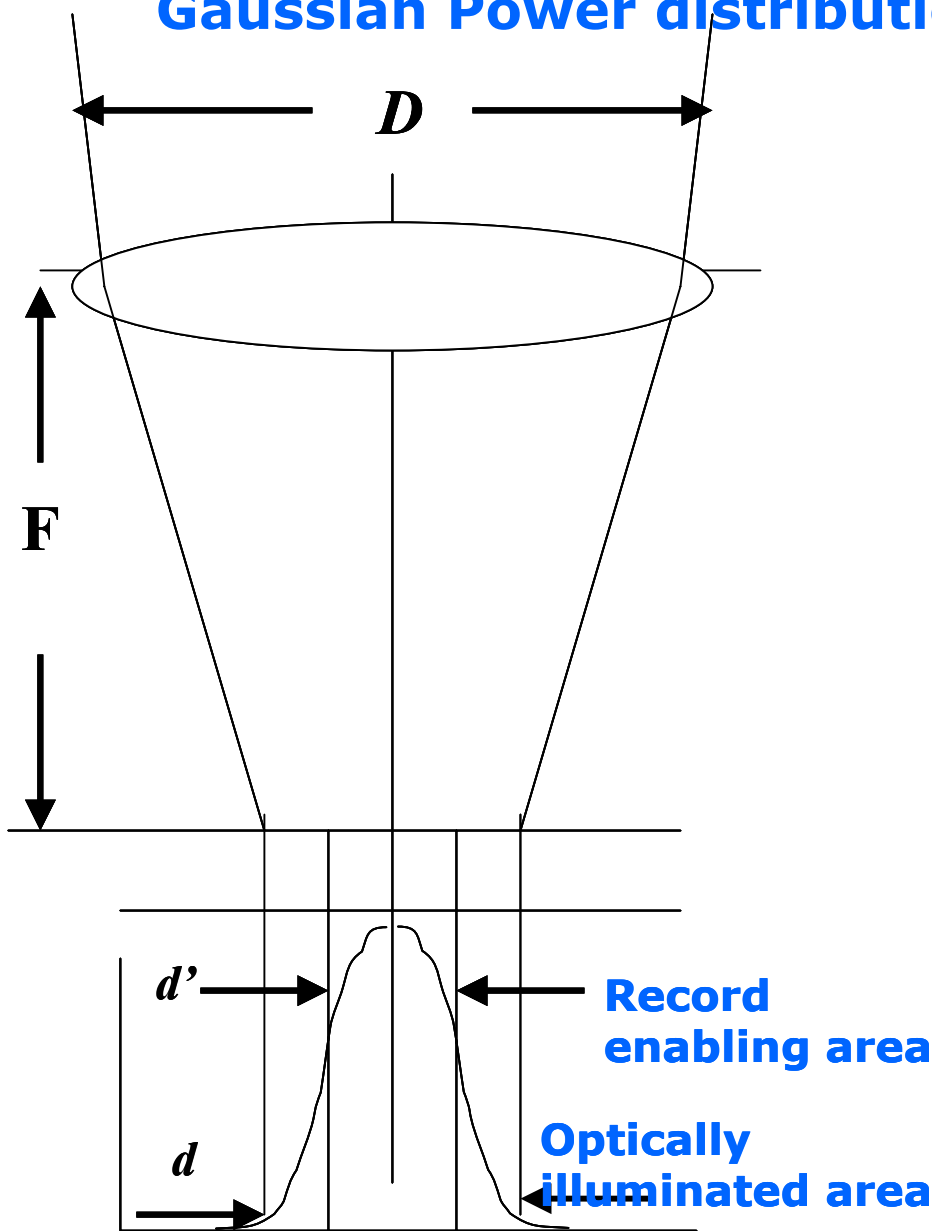

$$d' = \rho \lambda \text{NA}$$

$$d = \lambda \text{NA}$$


λ = laser wavelength

NA = Numerical aperture of lens

Magnetic Super Resolution MSR


Double Mask Rear Aperture Detection, RAD

Optical Illumination

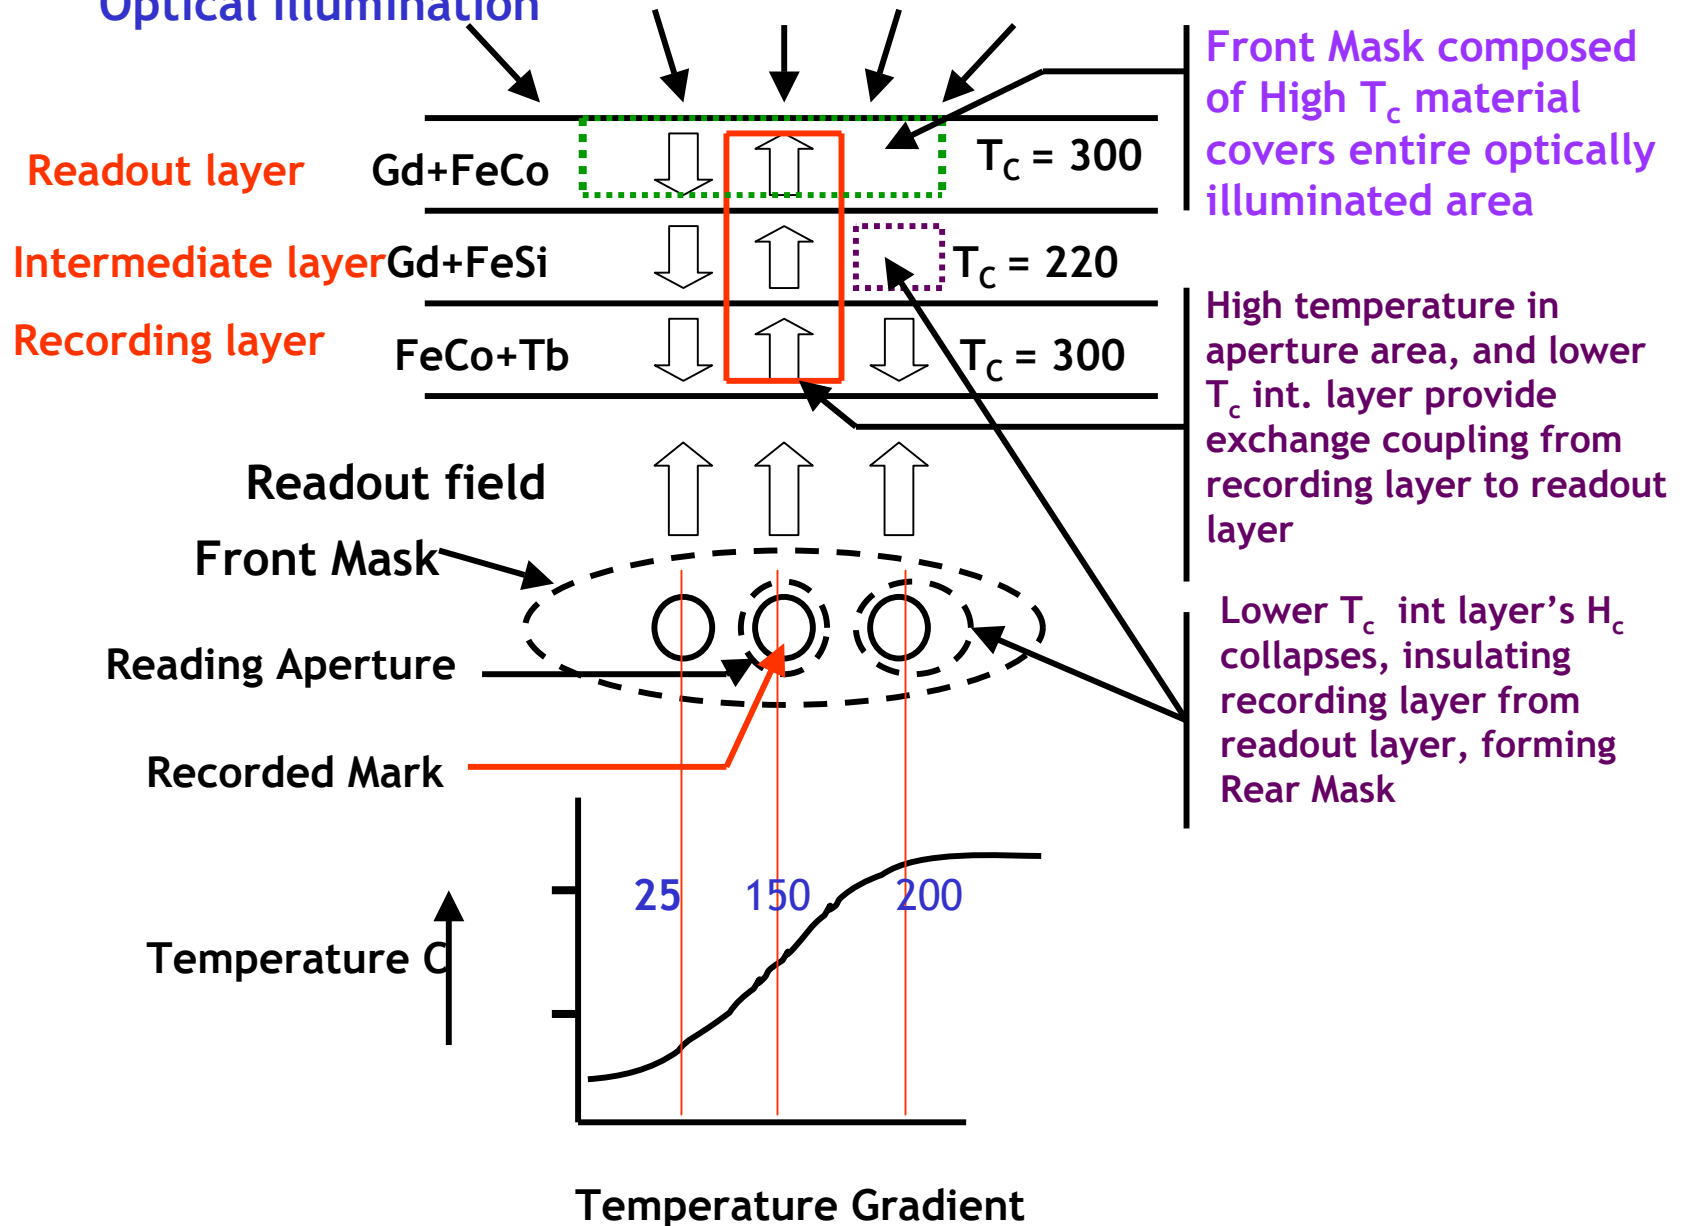

Magnetic Super Resolution (MSR)


Center Aperture Detection (CAD*)

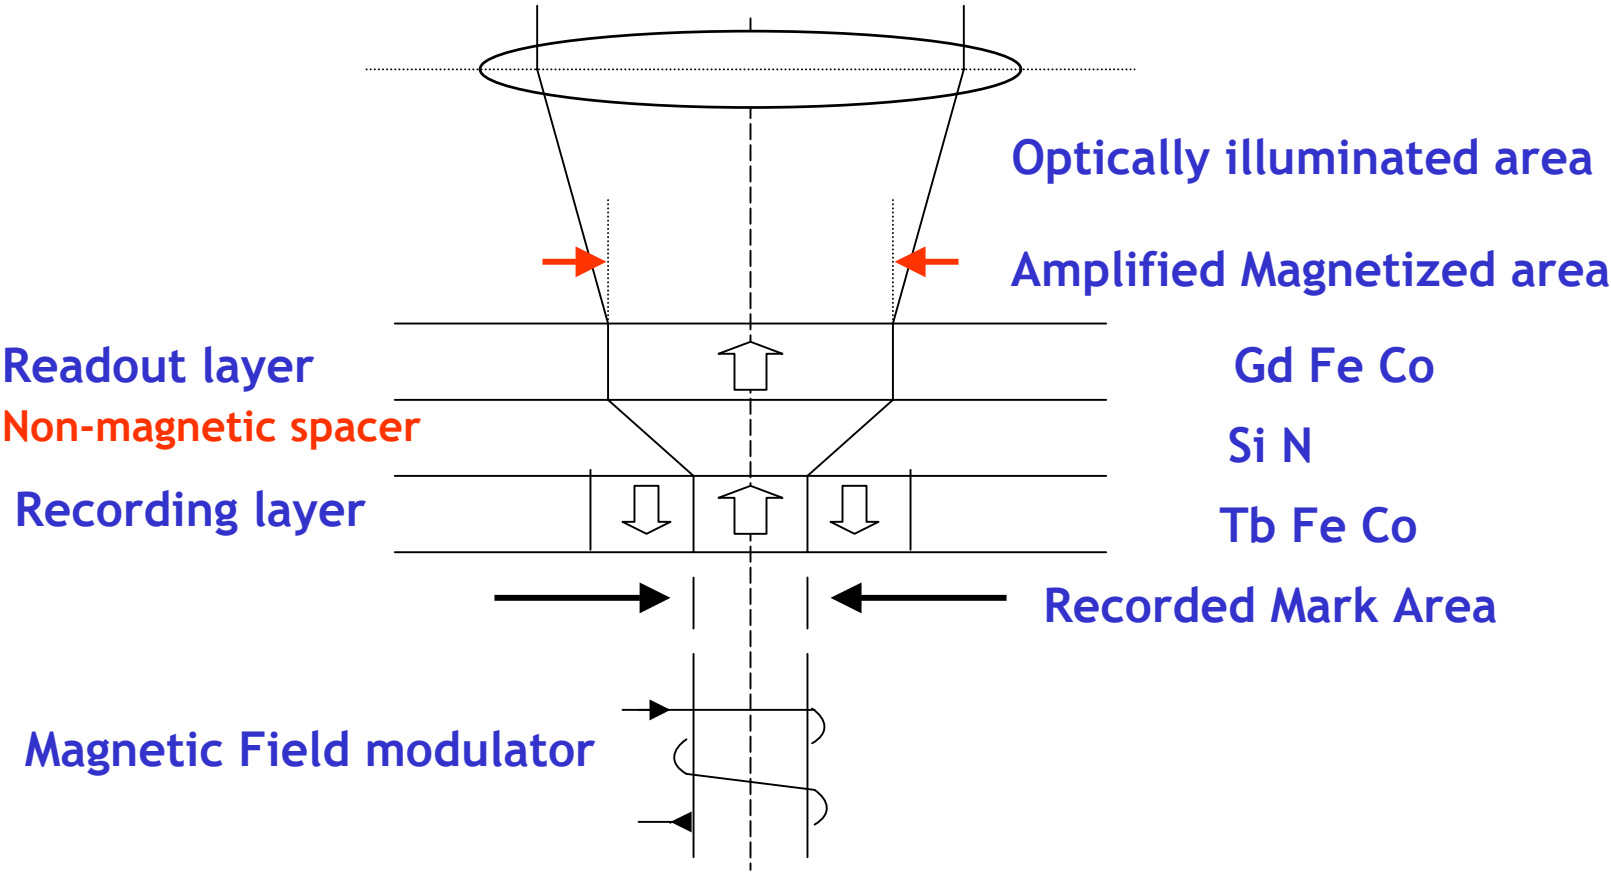

* Magnetic Amplifying Magneto Optical System (MAMMOS)

Recording Process (Phase Change)

- Erased state ----- Crystalline phase
- Recorded state ----- Amorphous phase

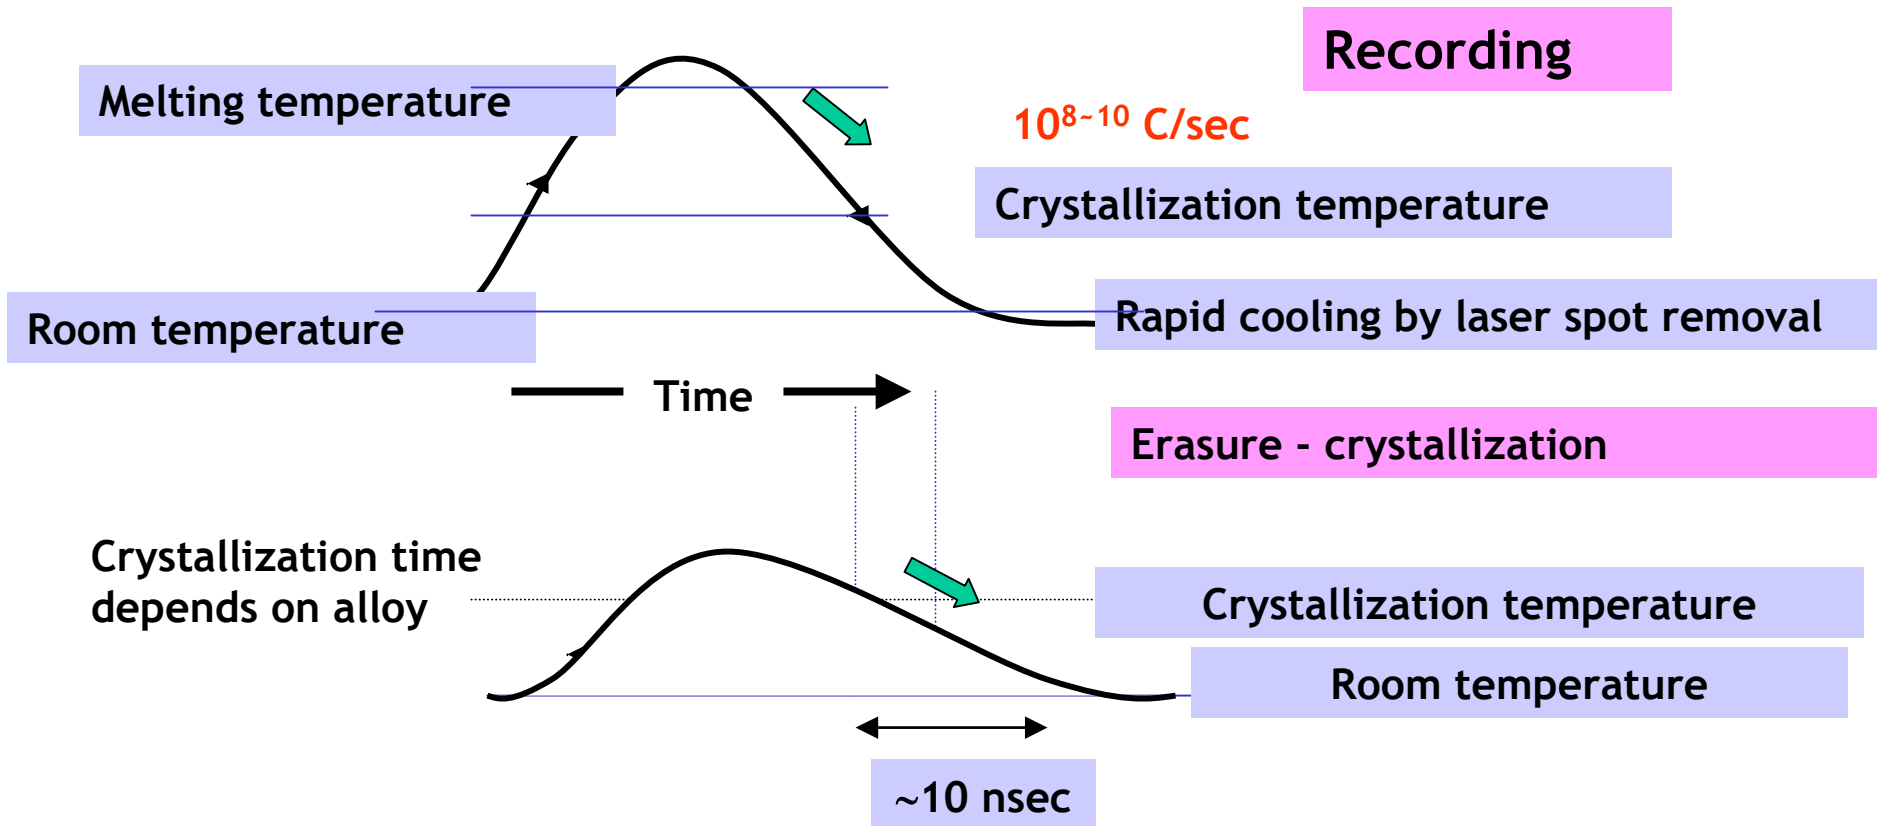


Data rate limited by crystallization time characteristic of the alloy


- Current status --- 8 MB/sec
- Near term objective --- 12 MB/sec

Single layer Phase Change disc structure

Te = Tellurium
Sb: Antimony
Ge: Germanium

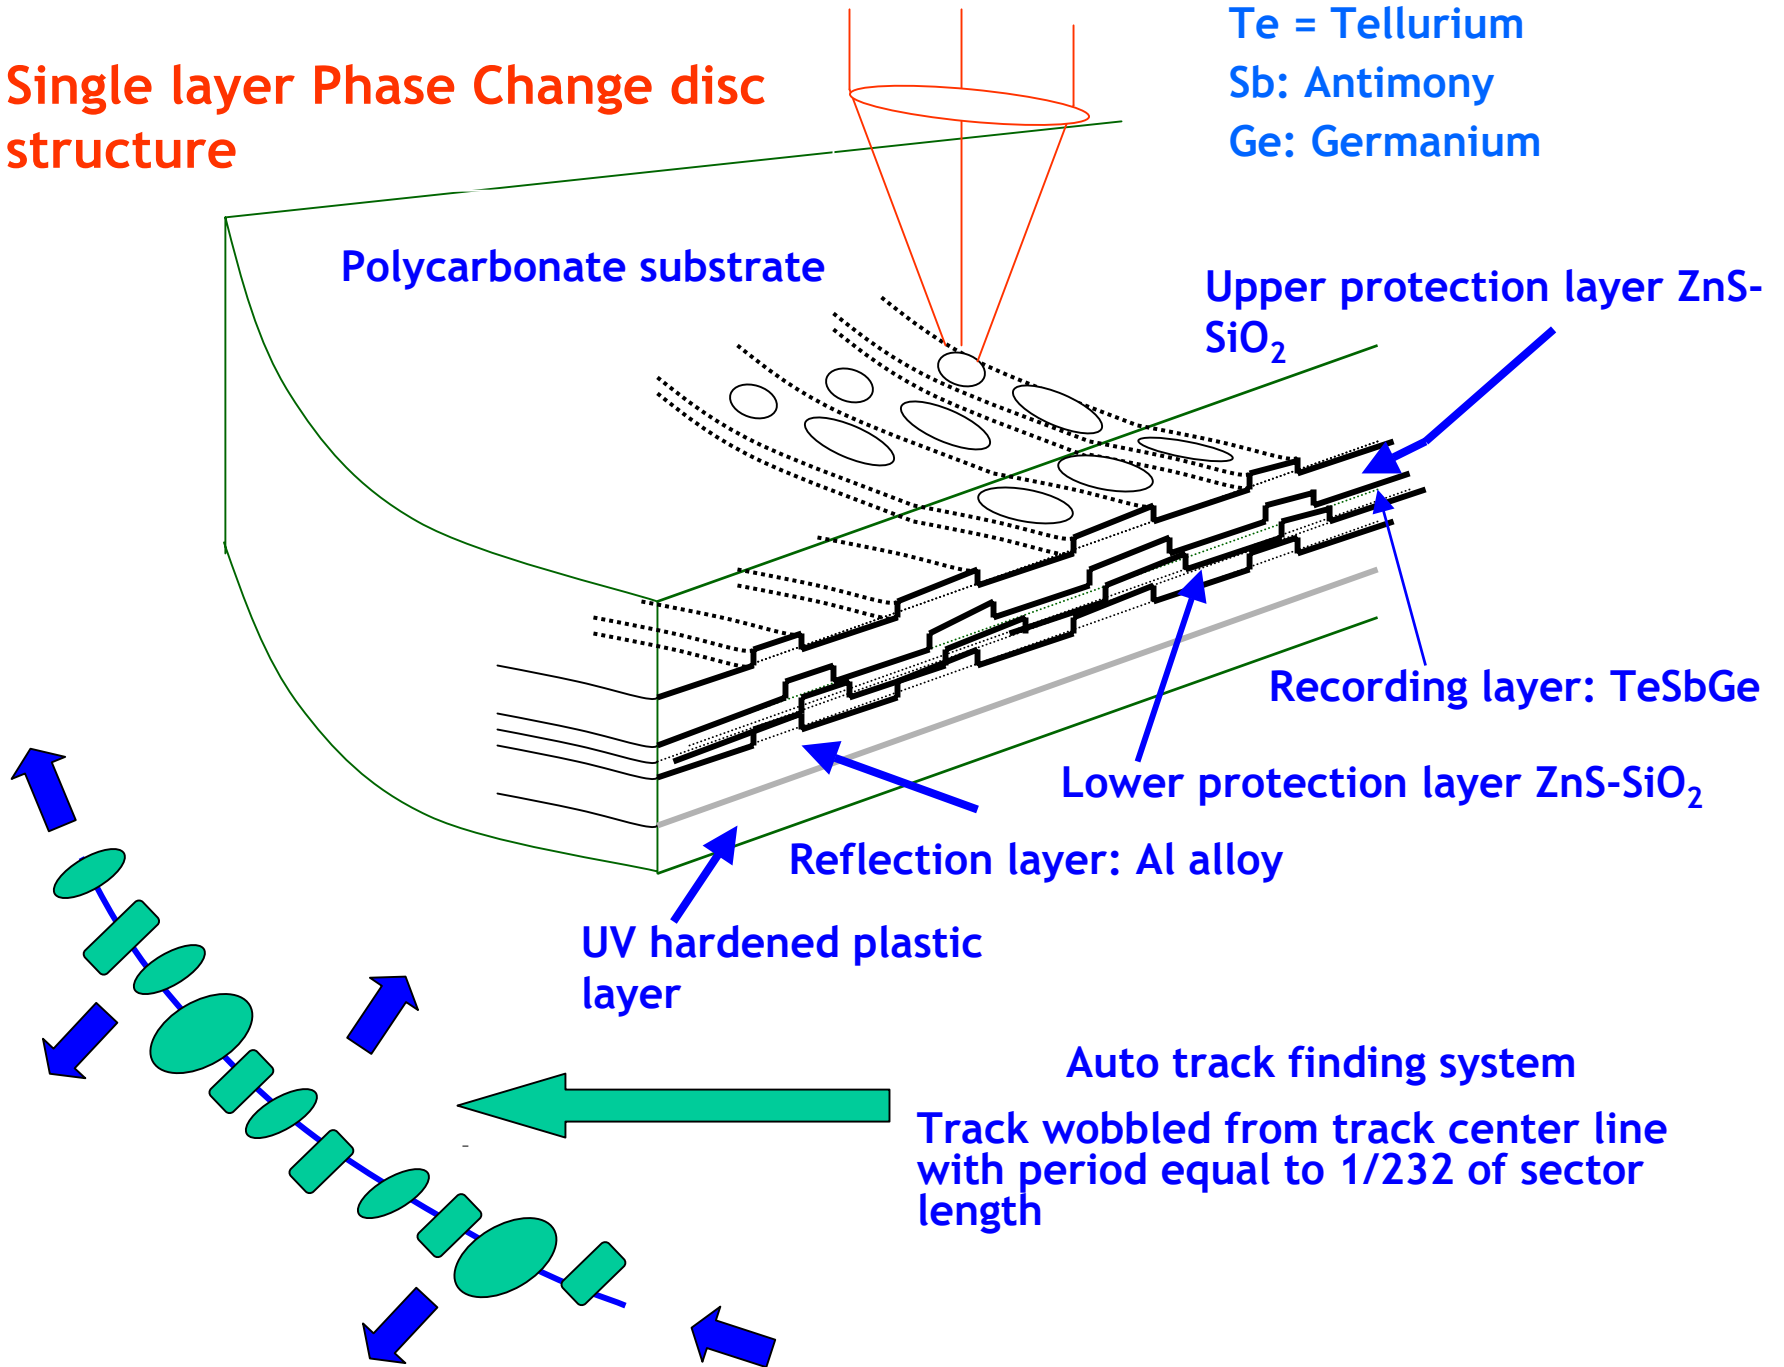

Double Recording Layer Disc Structure

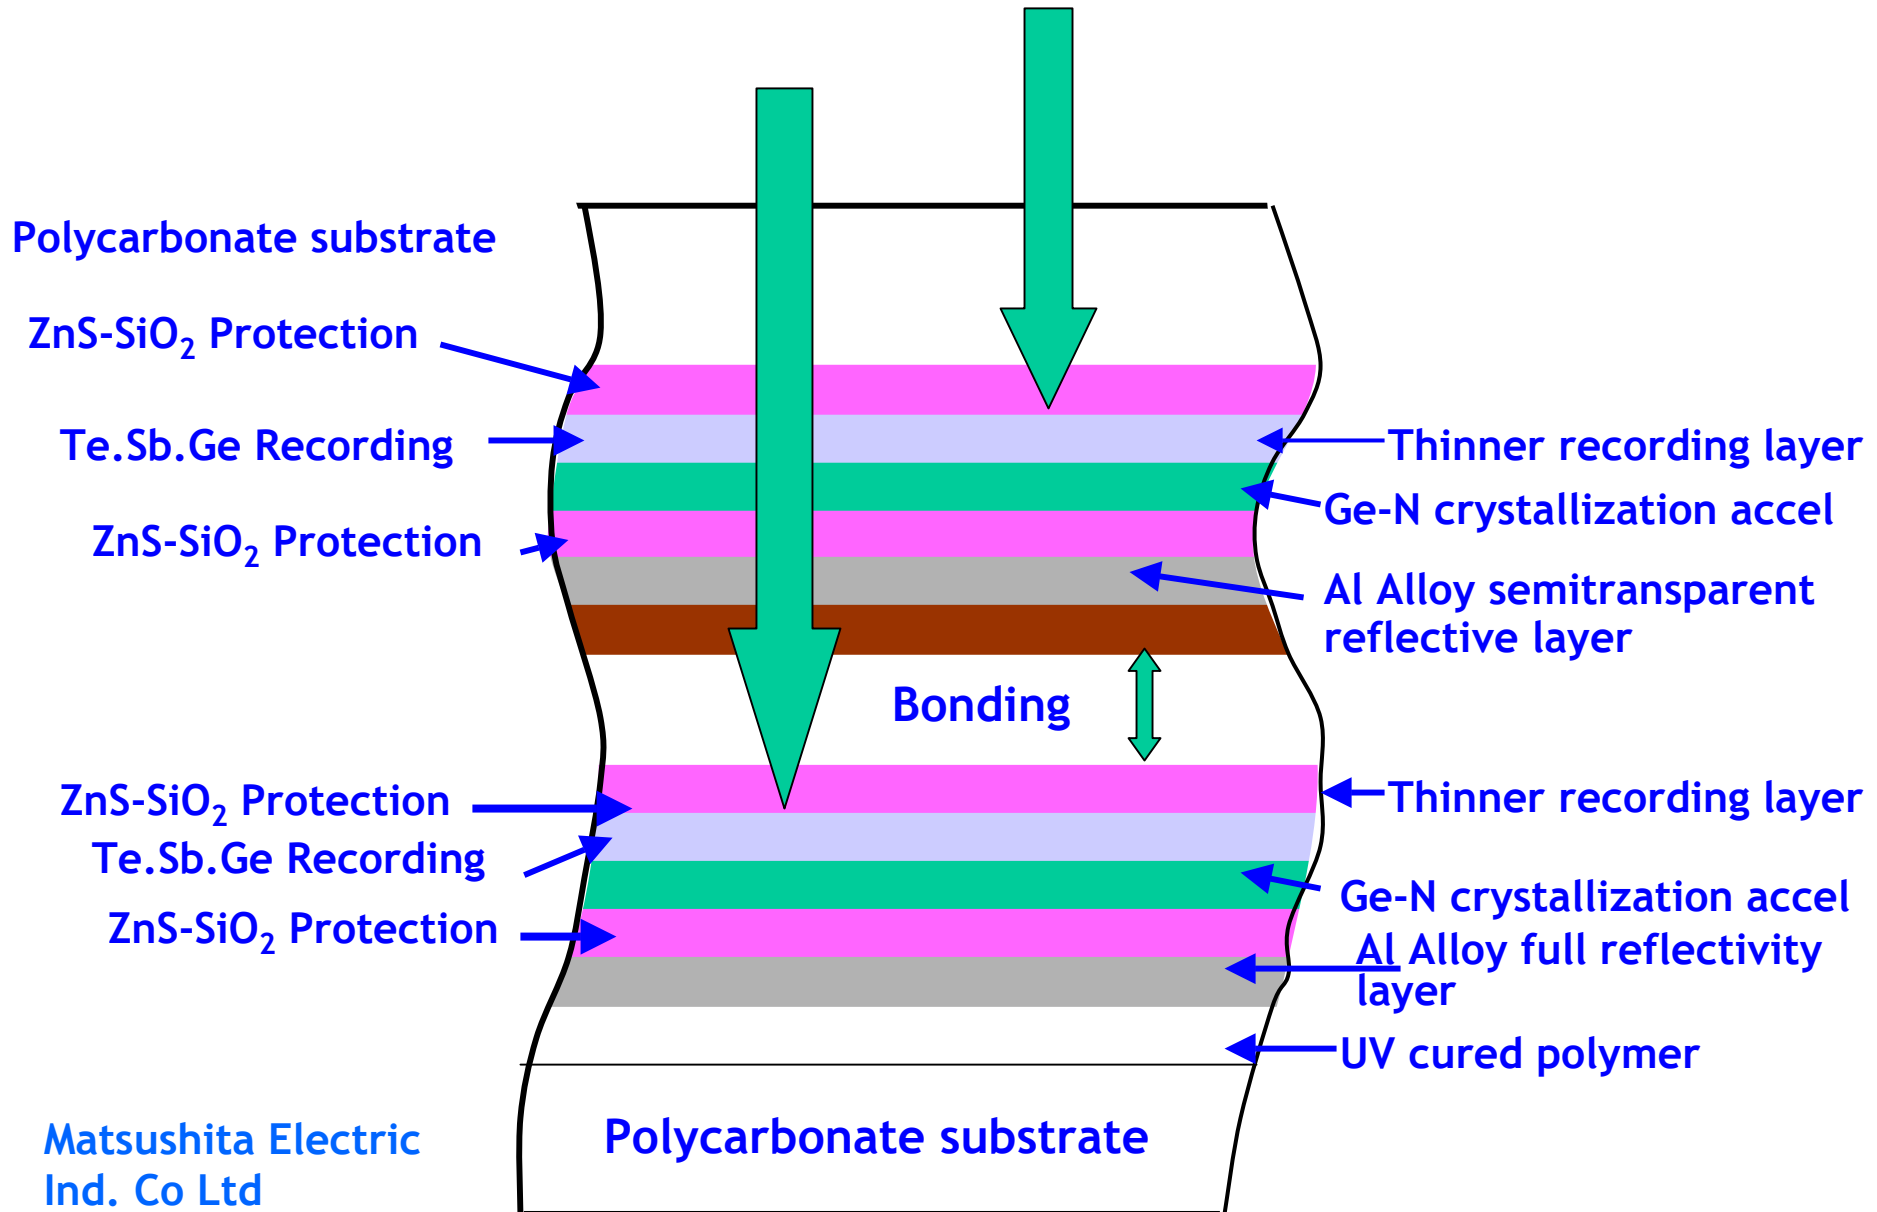

Next generation Optical Disc Recorder Prototypes

Common attributes

- Phase change recording
- laser wavelength 405 nm
- Lens NA = 0.85

Demonstration at recent trade exhibitions

Mfr	Capacity/ surface	# of sur- faces	Mb/se c	Track Utiliza- tion	Track Pitch	Min Mark Length	Mod code
Hitachi	25 GB	2 ⁽¹⁾	33	G	0.35 mm	0.20 mm	8-16
Matsu- shita	25	2 ⁽²⁾	33	G	0.32	0.185	D8-15
Pioneer	23	1	35	G	0.32	0.120	(1,7)
SONY/ Sanyo	23	1	35 ⁽³⁾	L+G	0.30	0.12	(1,7)
Toshiba	30	1	35		-	-	-

Notes on next slide

Next generation Optical Disc Recorder Prototypes

- Notes:
- (1) Double sides disc construction
 - (2) Double layer recording surface
 - (3) TDK Recording Media operates at 100 Mbps
 - (4) JVC did not demonstrate its 25 GB drive at show

Phase change vs Magneto-optics

Phase Change	2001	Next Generation, 2003-2004	
•Products	DVD-RAM	UDO ⁽¹⁾	NextGen DVD ⁽²⁾
•Capacity/surface, GB	4.7	20	25
•No of surfaces	2	2	2/4
•Bit area <i>mm x mm</i> ⁽³⁾	0.615 x 0.280	0.33 x 0.13	0.32 x 0.185
•Transfer Rate, MB/sec	1.2	4-8	4-6

Magneto-Optics

•Products	3.5" GIGAMO ⁽⁴⁾	ID Photo ⁽⁵⁾	3.5"GIGAM)	ID Photo
•Capacity	2.3	0.73	10.0	3.0
•No of surfaces	1	1	1	1
•Bit area	0.67x0.233	0.60x0.235		
•Transfer rate	8.38	2.5	20+	10


(1) SONY disc diameter = 130 mm (2) Matsushita prototype, two recording layers, both accessible from disc front
 (3) Track pitch x minimum mark length (4) Disc diameter = 90 mm
 (5) Disc diameter = 50 mm

Supporting Technology


Short wavelength Laser

- Gallium Nitride Crystal on Sapphire, Silicon Carbide or Silicon Dioxide
- Required capability: wavelength = 400 nm, output = 30 mW CW at 25 C, life = 3000 hrs minimum, 10000 hours desired
- Engineering samples offered by Nichica Chemical (Japan), Cree Inc (Durham NC)


• **Alternate Approach:** Wavelength conversion by optical nonlinear element

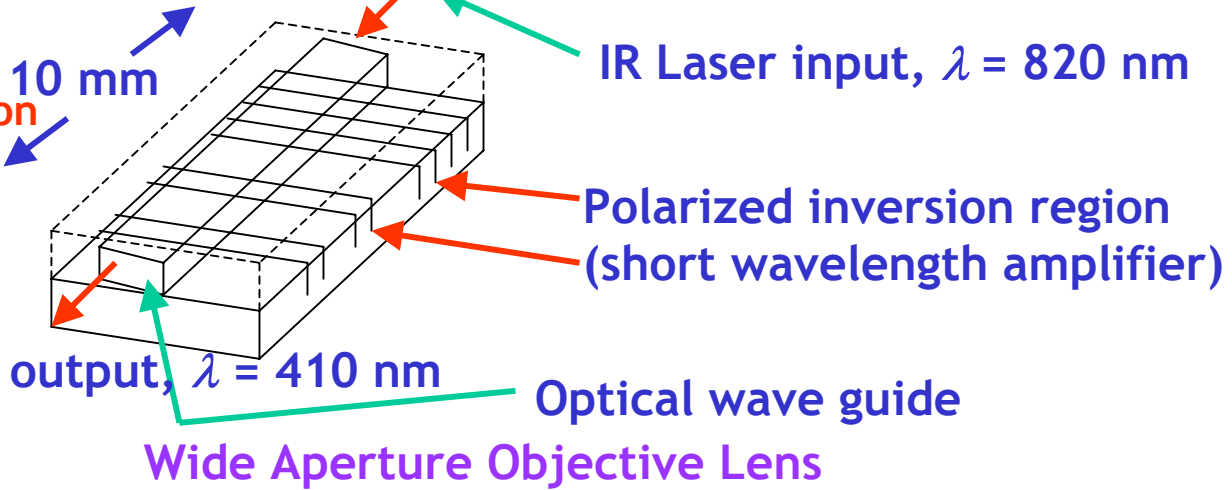

Conventional Approach

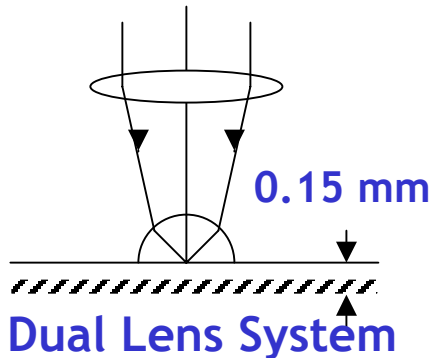


New Technique

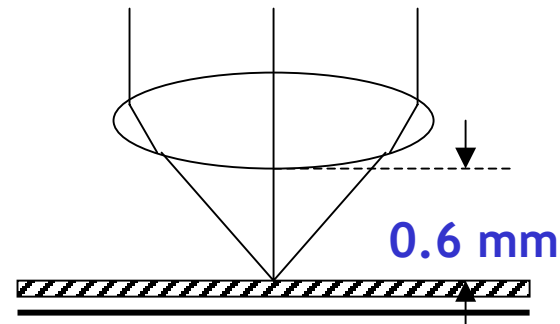

Single High Refractive Index Glass Lens

Dual Layer Magneto-Optical Disk

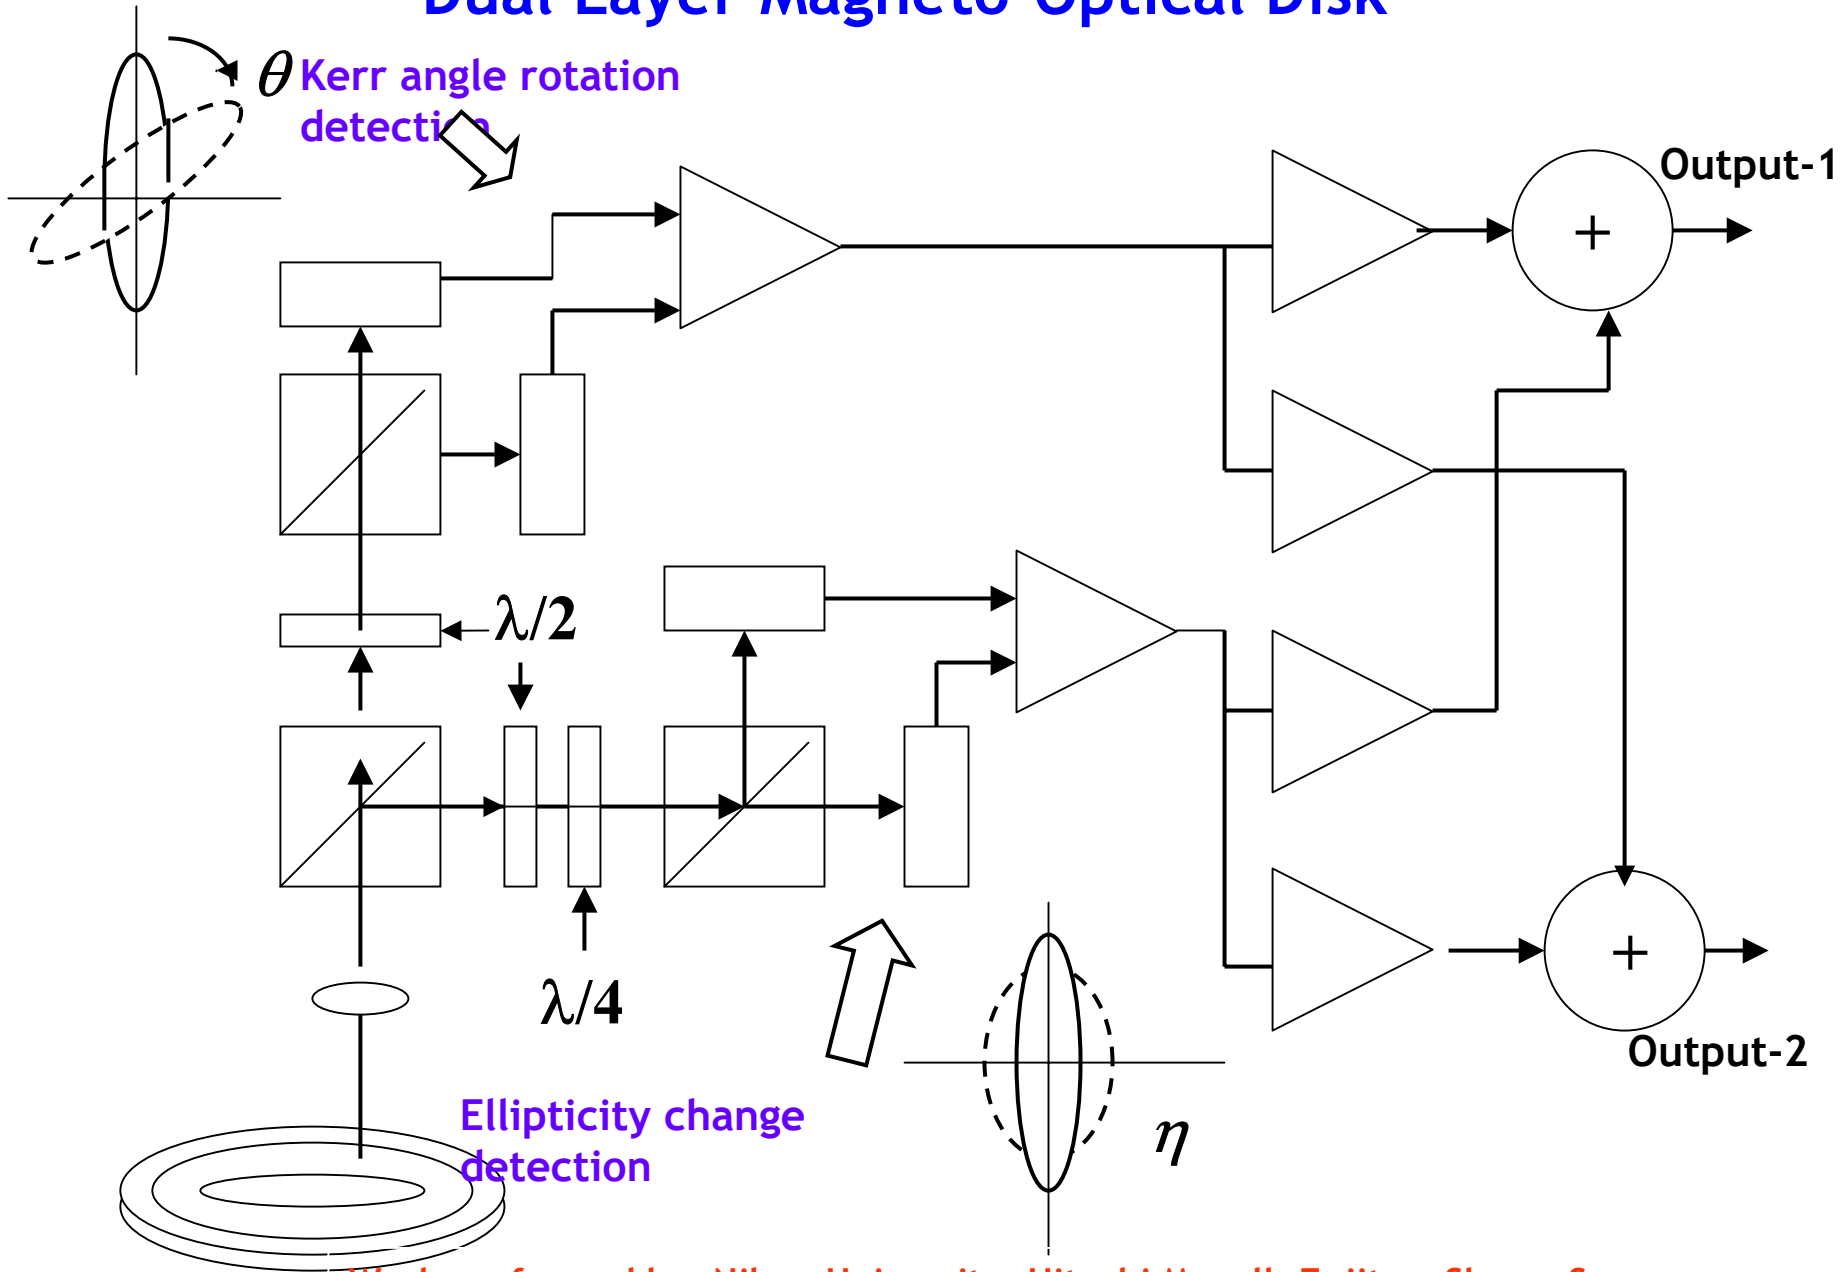

Work performed by: Nihon University, Hitachi Maxell, Fujitsu, Sharp, Sanyo

Road to 100 GB+ Disc

Markets

- Consumer HDTV Video Player ----- Data rate < 50 Mbps, low cost disc
- Industrial Rec./PB ----- Data rate > 100 Mbps
- Computer data backup ----- Data rate > 100 Mbps, WORM version also required (Lower Cost Disc)
- Broadcast camcorder ----- Data rate > 100 Mbps

Technology

- Blue laser ($\lambda = 400$ nm), Wide aperture lens (NA = 0.85 - 0.9)
- Phase change Recording
 - Per surface capacity = 25 - 35 GB
 - Max 4 recording surfaces (Double layer, double sided)
 - Data transfer rate = upto 100 Mbps
- Magneto-optical recording
 - Magnetic Super resolution (MSR) technology
 - Per surface capacity = 30 - 50 GB
 - Two recording surfaces (double sided)
 - Data transfer rate = 150 - 200 Mbps

Road to 100 GB+ Disc (contd)

Commercial Products Introduction

- Technology Development essentially completed
- Standardization ?
- Market driven - possibly 2004 - 2005

Removable Data Storage package and Storage Efficiency

Data Storage Efficiency $\varepsilon = \text{User Data/Package Volume} = \text{MB/cc}$

Removable Data Storage Package

- Magnetic tape cassette: DVCPRO-HD, 125x78x14.8 mm = 143 cc
Capacity = 69 GB, $\varepsilon = 485$
- Magnetic tape cartridge: LTO Ultrium⁽¹⁾, 125x109x26 mm = 350 cc
Capacity = 100 GB, $\varepsilon = 285$
- Hard Disc Drive: IBM Travelstar 48GB⁽²⁾, 100x70x12.7 mm = 89 cc
Capacity = 48 GB, $\varepsilon = 540$
- Recordable Optical Disc: DVD-RAM, Double side, 150x150x3 mm = 67.5 cc⁽³⁾, Capacity = 9.4 GB⁽⁴⁾, $\varepsilon = 139$




Notes: (1) First generation product

(2) 2.5", half-height package

(3) Dimensions for disc carrier used in jukebox system

(4) Higher capacity versions in development

Data Storage Efficiency Improvement Trends

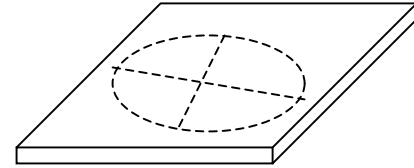

Package	Tape Cassette	Tape Cartridge	HDD	Optical Disc
Products	6.35 mm helical Tape	LTO Ultrium	2.5" half- height	120 mm recordable with carrier
Volume, cc	143	350	89	67.5
2001 - Γ ⁽¹⁾	69/485	100/285	48/540	9.4/139
2004 - Γ ⁽¹⁾	150/1100	400/1140	150/1650	100/1400

(1) Γ = Capacity/Efficiency; Capacity = GB, Efficiency = MB/sec