

Possibilities and Pitfalls in the Network Attached Peripheral


Rodney Van Meter USC/Information Sciences Institute rdv@isi.edu http://www.isi.edu/netstation/

Tape Head Interface Committee San Diego, CA January 21, 1998



Netstation

Netstation is a system composed of **network-attached peripherals** (**NAPs**) created by replacing the system bus in a workstation with a gigabit network.

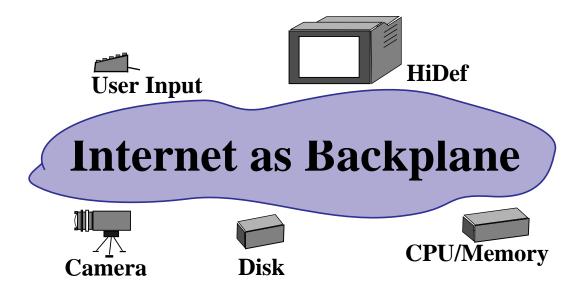

- Use Internet protocols for ubiquitous device access
- Based on ATOMIC 640 Mbps switched network




The Netstation Project

Gregory Finn (project leader), Steve Hotz, Rodney Van Meter, Bruce Parham and Reza Rejaie http://www.isi.edu/netstation/ Technologies for NAPs:

- Networking protocols
- OS paradigms
- NAP security
- Multimedia & storage






Talk Outline

- Introduction
- Network Technologies
- NAPs in Mass Storage
- Operating System Support
- Conclusion





What is a Network Attached Peripheral?

Any computer peripheral attached directly to some form of network, rather than a bus.

- ATM frame buffers
- Fibre Channel disk drives
- 1394 cameras
- SSA RAID arrays
- HiPPI tape drives



Characteristics of Network-Attached Peripherals (NAPs)

- Scalable physical interconnect (# of nodes, distance, etc.)
- No physically defined **owner**
- Interconnect shared w/ general-purpose traffic ==> imperfect control over net use
- Higher latency than bus
- Delivery subject to usual network problems (packet loss, out-of-order delivery, fragmentation, etc.)
- Support for **3rd party transfer** (direct device-to-device communication)

Present in varying degrees in different systems.



Problems Faced with NAPs

Closed, bus-centric architecture allows simplifying assumptions about resource identification, security and sharing.


- Set of resources not constrained by architecture
- Network issues of scale & heterogeneity
- Control of devices not limited to bus master
- Non-dedicated network
- Security now paramount



What are NAPs Good for?

- Better scaling (distance, # nodes, aggregate bandwidth)
- Simpler cabling
- Direct device-to-device communication
- Direct device-to-client comm. reduces server load
- Better sharing






Talk Outline

- Introduction
- Network Technologies
- NAPs in Mass Storage
- Operating System Support
- Conclusion






Network Technologies for NAPs

All seven layers in ISO model open to debate

- Application
- Presentation
- Session
- Transport
- Network
- Link
- Physical





Proposed & In-Use Networks

- HiPPI 800
- HiPPI 6400
- Fibre Channel fabrics
- Fibre Channel Arbitrated Loop
- FireWire (1394)
- Gigabit ethernet
- ATM
- Serial Storage Architecture (SSA)
- Myrinet
- SBCON
- various others





Networking Problems for NAPs

as I/O Nets Get Larger and More Complex:

- Media Bridging (Routing, Addressing)
- Congestion
- Flow Control
- Demultiplexing @ Endpoints

 (Destination Address Calculation, Control/Data Sifting, Upper Layer Protocols)
- Latency Variation
- Security
- Reliability
- Heterogeneity (Hosts, Traffic Types, Nets)

All Become Bigger Problems! But...



The Internet Community Has Solved Most of the Problems


- Strengths of IP: issues of scale and heterogeneity
- Weakness: Performance
- ISI's Netstation is using & promoting TCP/IP and UDP/IP
- Performance problems can be solved





- Heterogeneous Interconnects
 - Intra-Machine Room
- Wide-Area Access
 - Enables Remote Mirroring and Backups
- Future Growth
 - Not Media-Specific
- Lower R&D Investment in Networking





Talk Outline

- Introduction
- Network Technologies
- NAPs in Mass Storage
- Operating System Support
- Conclusion



NAPs in Mass Storage

- SGI Origin 2000?
- CMU Network-Attached Secure Disk (NASD)
- HPSS
- LLNL's Network-Attached Peripheral (NAP) RAID
- Fibre Channel Disk Drives
- Palladio at HP Labs
- Petal/Frangipani at DEC
- Global File System from UMinn
- National Storage Industry Consortium's NASD Committee http://www.hpl.hp.com/SSP/NASD/




Network Disk Services

Should a drive present a SCSI (block) model, or NFS (file) model, or something in between?


- Low-level interface easily supports other uses (non-Unix file systems, databases, swap space, network RAID)
- File model may distribute functionality more widely, scaling better
- Architectural tradeoffs are complex






Third Party Transfer

• Direct device-to-device transfer

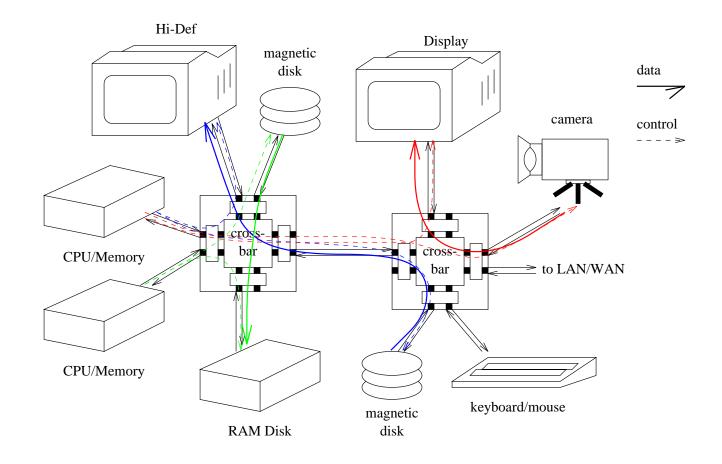






Talk Outline

- Introduction
- Network Technologies
- NAPs in Multimedia
- NAPs in Mass Storage
- Operating System Support
- Conclusion






Operating System Issues with NAPs

- Resource discovery
- Concurrency/sharing
- Security
- Programming paradigms for third-party transfer





Security


- Access not physically constrained
- Cryptographic authentication required
- Who a request comes from is more important than where
- Devices don't understand "users"
- Netstation approach: Derived Virtual Devices (DVDs)



Third-Party Transfer

- read/write paradigm inadequate -- generalize to move(source,destination)
- Concurrency management
- Error handling: to partner, requestor or owner of one or both devices?
- Details: boundary conditions, blocking factors, generalized RPC formats





Conclusions

- Network Attached Peripherals (NAPs) allow new system architectures More scalable interconnects Direct device communication
- Key issues:

Security

Scale

Performance

Legacy

- "A Brief Overview of Current Work on Network Attached Peripherals", ACM OSR Jan. '96 or web page below
- http://www.isi.edu/~rdv/