

THIC Inc.

2002 NSIC Tape Roadmap

Dr. Robert M. Raymond

Storage Technology Corporation

One StorageTek Drive, Louisville CO 80028-4272

Phone: +1-303-673-4201

E-mail: Robert_Raymond@StorageTek.com

**Presented at the THIC Meeting at the National Center
Center for Atmospheric Research**

Boulder CO 80305-5602

June 11-12, 2002

Outline

- **NSIC Overview**
- **The storage hierarchy**
- **Tape roadmap team and approach**
- **Tape applications and systems conclusions**
- **Technical roadmap review**
- **Technical challenges**
- **Conclusions**

NSIC (National Storage Industry Consortium) Overview

- **Founded in 1991**
- **Membership:**
 - 20 storage companies
 - 32 universities and government labs
- **Activities**
 - Create an information storage industry technology roadmap and research strategy
 - Work with government to gain support for the information storage industry
 - Foster the establishment of pre-competitive joint research projects, involving collaboration among its members

NSIC Project Overview

- *Extremely High Density Recording* - 6 Companies, 15 Universities - began 11/96 - Sponsored by Companies and NSF
- *Network Attached Storage Devices* - 5 Companies, 1 University - 1/97 to 12/99 - Sponsored by Participants
- *Multiple Optical Recording Enhancements* - 3 Companies, 2 Universities - 11/97 to 2/02 - Government Sponsor: NIST/ATP
- *Advanced Magnetic Tape Storage Technology* - 6 Companies, 4 Universities - began 12/99 - Sponsored by Companies
- *Heat Assisted Magnetic Recording* - 4 Companies, 2 Universities - began 11/01 - Government Sponsor: NIST/ATP

NSIC Roadmap Activity

1993-94: Storage Technology Roadmaps

Workshops:
Report:

April 1993; March 1994; April 1994
September 1994

1996-97: Optical Disk Storage

Workshop:
Report:

April 1996
June 1997

1997: Hard Disk Drive Technology

Workshop:
Report:

February 1997
Incorporated in July 1997 Proposal

1997-98: Magnetic Head Metrology

Workshop:
Report:

June 1997
February 1998

1997-98: Magnetic Tape Storage

Workshop:
Report:

September 1997
June 1998

1999: International Workshop on Holographic Data Storage

Workshop:
Executive Report:

March 1999
December 1999

1999-2000: Optical Disk Storage

Workshop:
Report:

November 1999
February 2000

2001-2002: Magnetic Tape Storage

Workshop:
Report:

June 2001
February 2002

2002 NSIC Tape Roadmap


Team Leaders

NSIC:	C. Denis Mee, Barry Schechtman
Applications Section:	Bill Phillips
Technology Section:	Bob Raymond (StorageTek)
Heads:	Richard Dee (StorageTek), Jim Bain (CMU)
Media:	Mike Sharrock (Imation)
Channel:	Richard Barndt (HP)
Drive:	Durkee Richards (Imation)
Helical:	John Woelbern (SONY)



Storage Subsystem Price Trends

(OEM price/equiv. unless otherwise noted; no capacity compression or utilization factors)

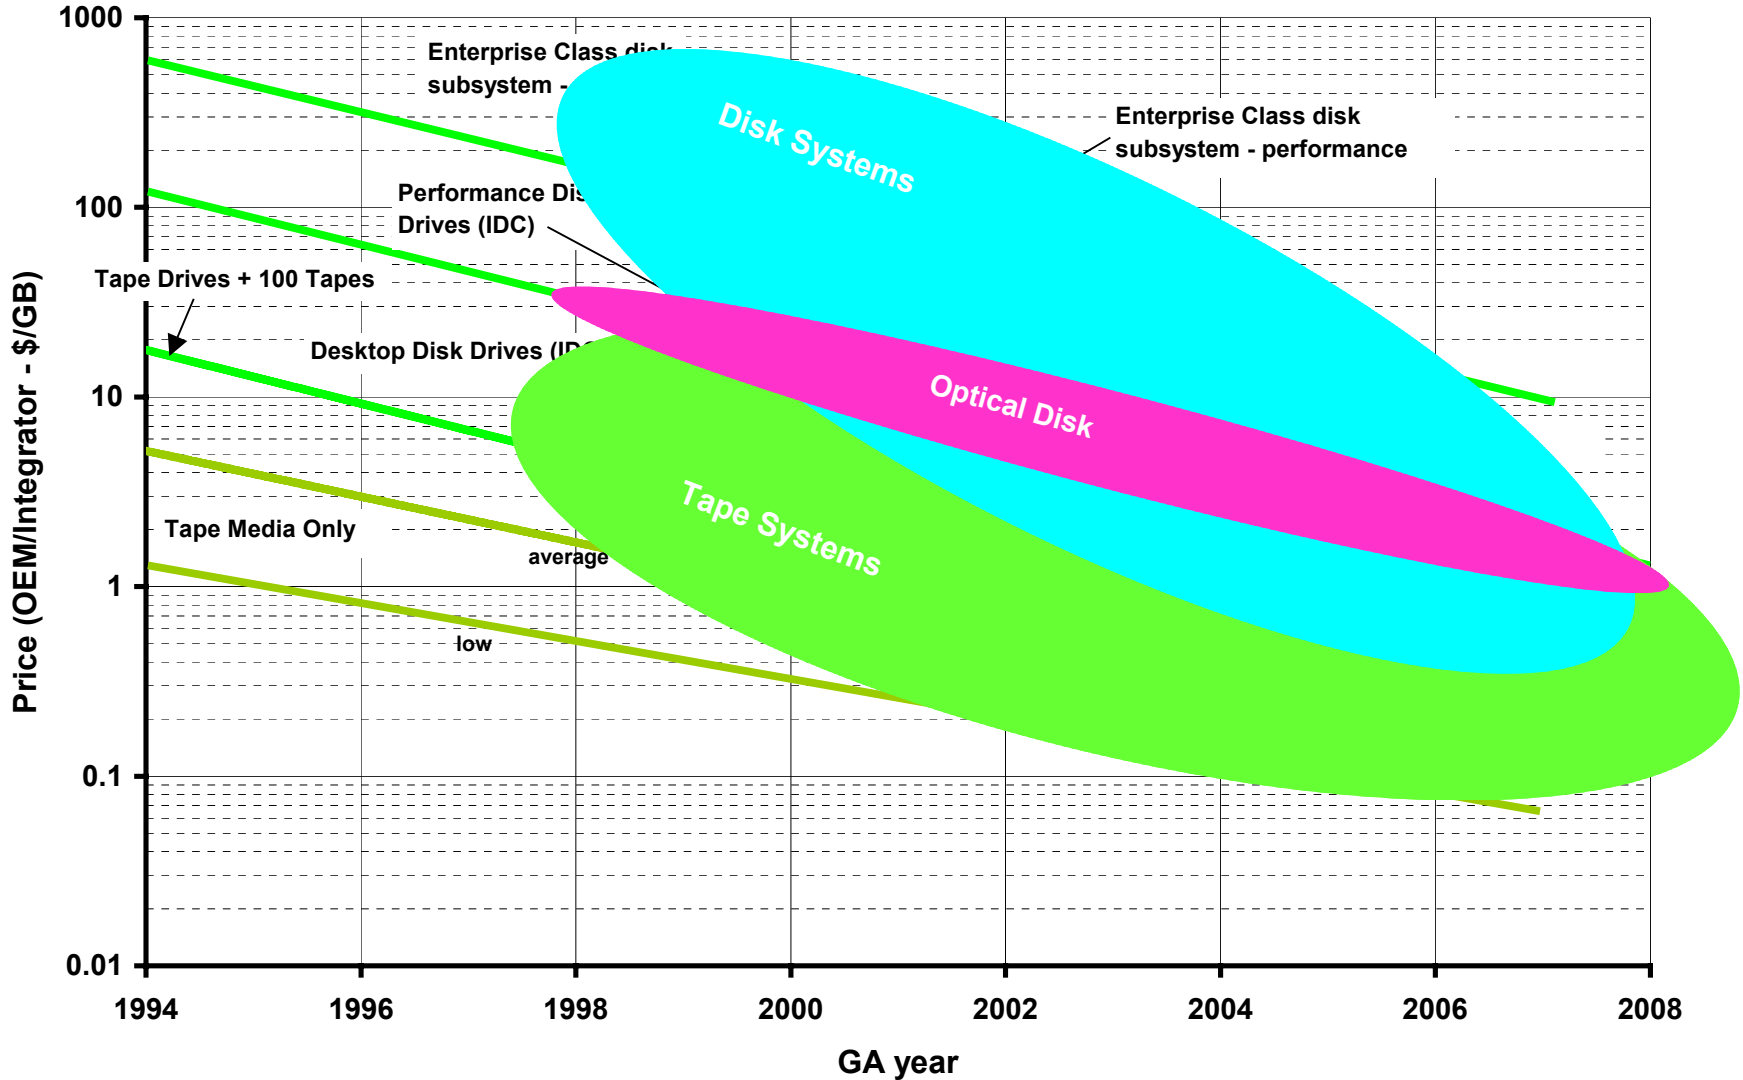


2001 NSIC Tape Roadmap

- 10 year roadmap.
- Consensus of over 40 researchers
 - Representing virtually every large tape drive manufacturer, tape media and substrate supplier, many of the leading research universities.
- Primarily focused on linear tape (helical section by Sony).
- Goal to remain competitive with disk (\$/MB) *and* be technically feasible.
- Keep the ratio of the capacities of a tape cartridge to a single 3 1/2 disk platter constant. (Ratio = 3.3 at time of roadmap)
- Assume:
 - Disk capacity growth will be 60%/year
 - Disk data rate growth will be 26%/year

Tape Applications and Systems Conclusions

- **Tape use is migrating away from the desktop to the data center.**
- **The most prevalent applications for high capacity high data rate tape are backup and restore as well as archive in an automated open systems environment.**
- **In these applications tape must continue to remain cost competitive to magnetic disk.**

Magnetic Recording Definitions

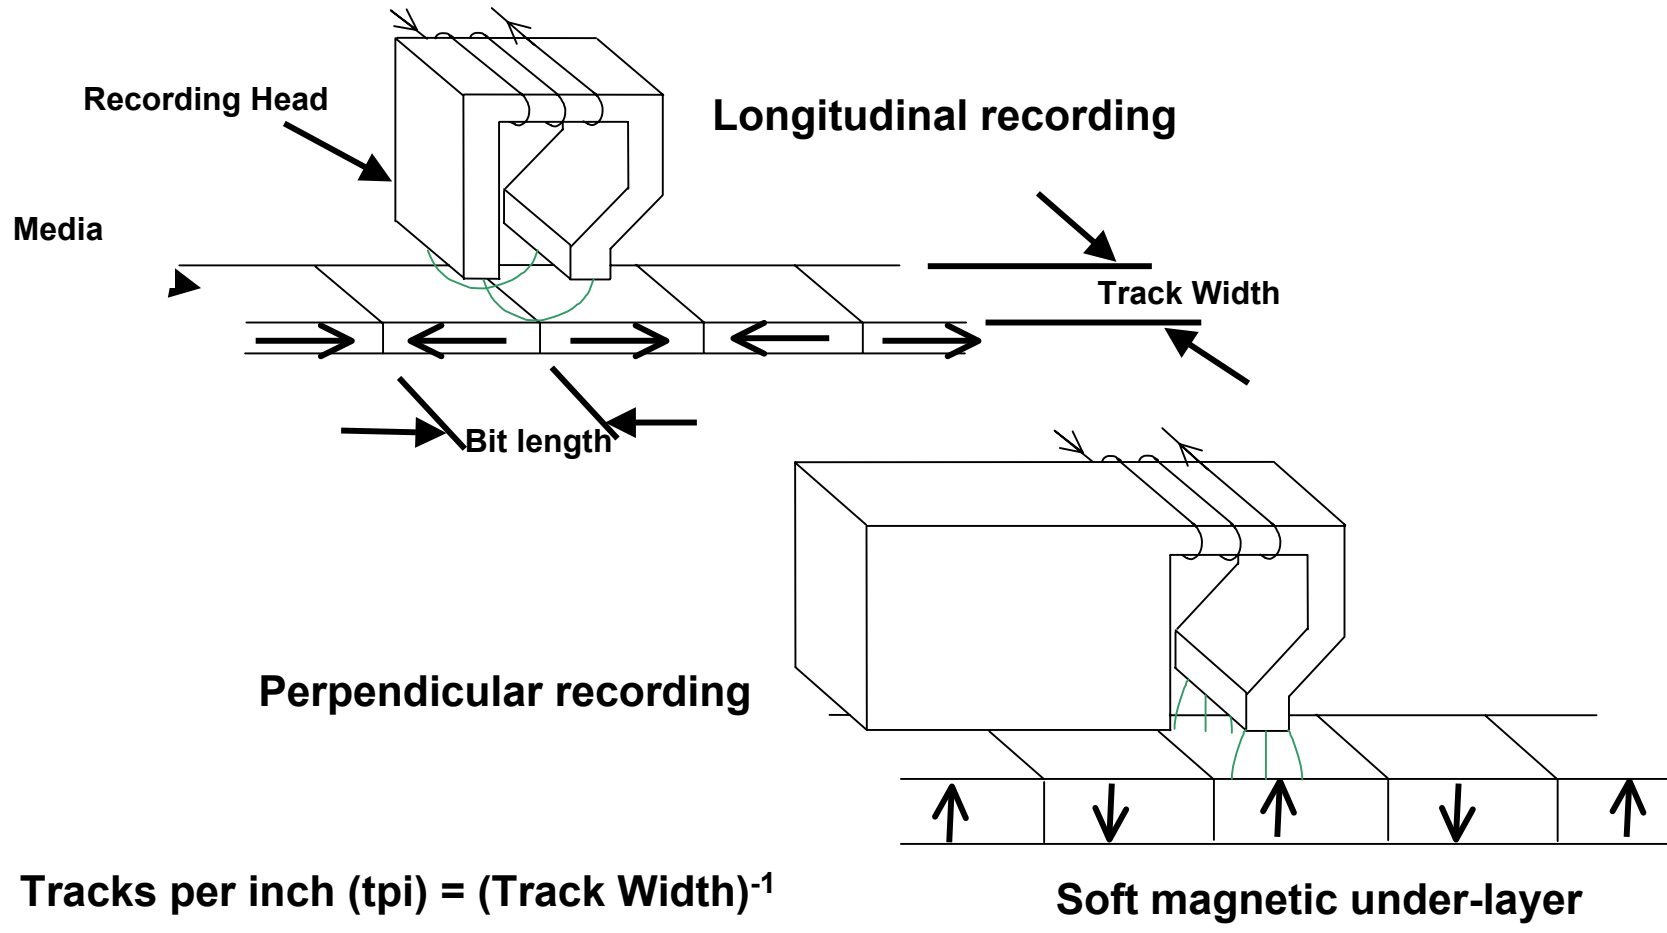

$$\text{Tracks per inch (tpi)} = (\text{Track Width})^{-1}$$


$$\text{Bits per inch (bpi)} = (\text{Bit Length})^{-1}$$

$$\text{Areal density} = (\text{Tracks per inch}) \times (\text{Bits per inch})$$

Typical Tape Data Tracks



288 LINEAR TRACKS

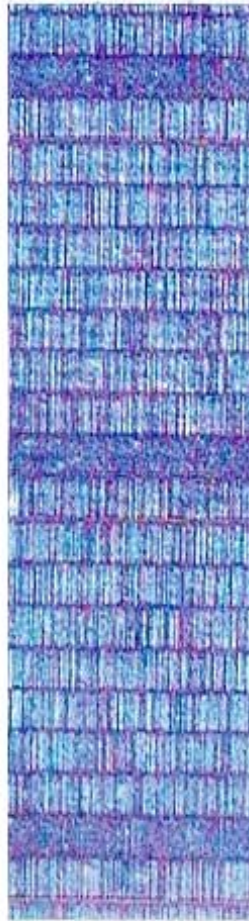

196X

Will Disk Areal Density Growth Slow

■ Super-paramagnetic effect

- Limit ~1Tbit/inch² *

■ Disk

- Disk is at ~0.050Tbit/inch² today
- **14 inch² recording area on 3 ½ inch platter**
- At 60%/yr growth the limit will be reached in about 7 years
- =>Disk capacity growth will slow down over the next 10 years as the limit is approached and new technologies must be developed.

■ Tape


- Tape is at ~0.0001Tbits/ inch² today
- **14,000 inch² recording area on ½ inch cartridge**
- At 60%/yr capacity growth tape will reach 0.005Tbits/inch² in 10 years
- =>Tape will not reach any fundamental limits

Advantage of
Tape



*"A Hard Disk Drive Using Magnetic Recording at One Terabit Per Square Inch," Roger Wood (IBM), presented at the NSIC Alternative Storage Technologies Symposium, June 26, 2001. Proceedings are available from NSIC, nsic@nsic.org or 858-279-7230.

Tape technology is accelerating to head them off at the pass!

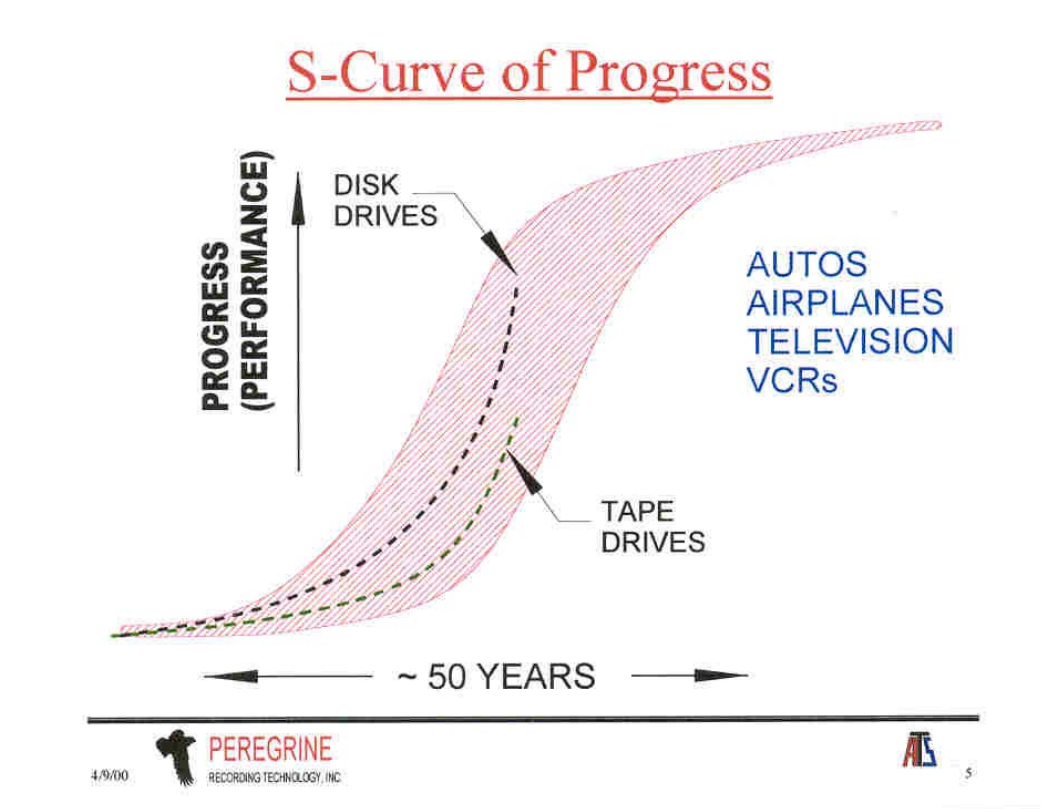


From “Magnetic tape as the mass storage medium” T. Schwarz,
IEEE/NASA Goddard Mass Storage Systems Conference (2000)



Areal Density Perspective


20-42 Tbit/in² Single Particle Superparamagnetic Limit

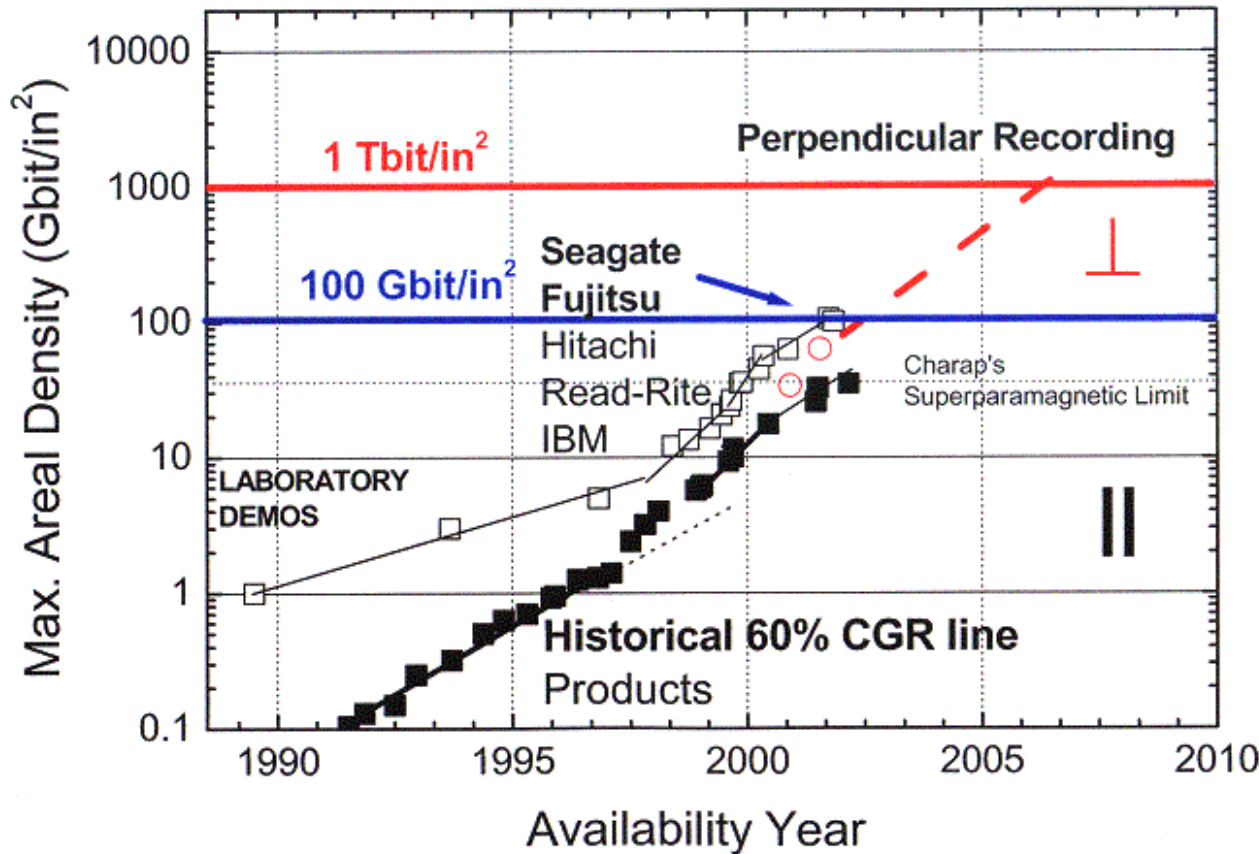

Demos:
 ~100 Gbps
 ~ 64 Gbps

Products:
 ~35 Gbps

Tape Areal Density Trends

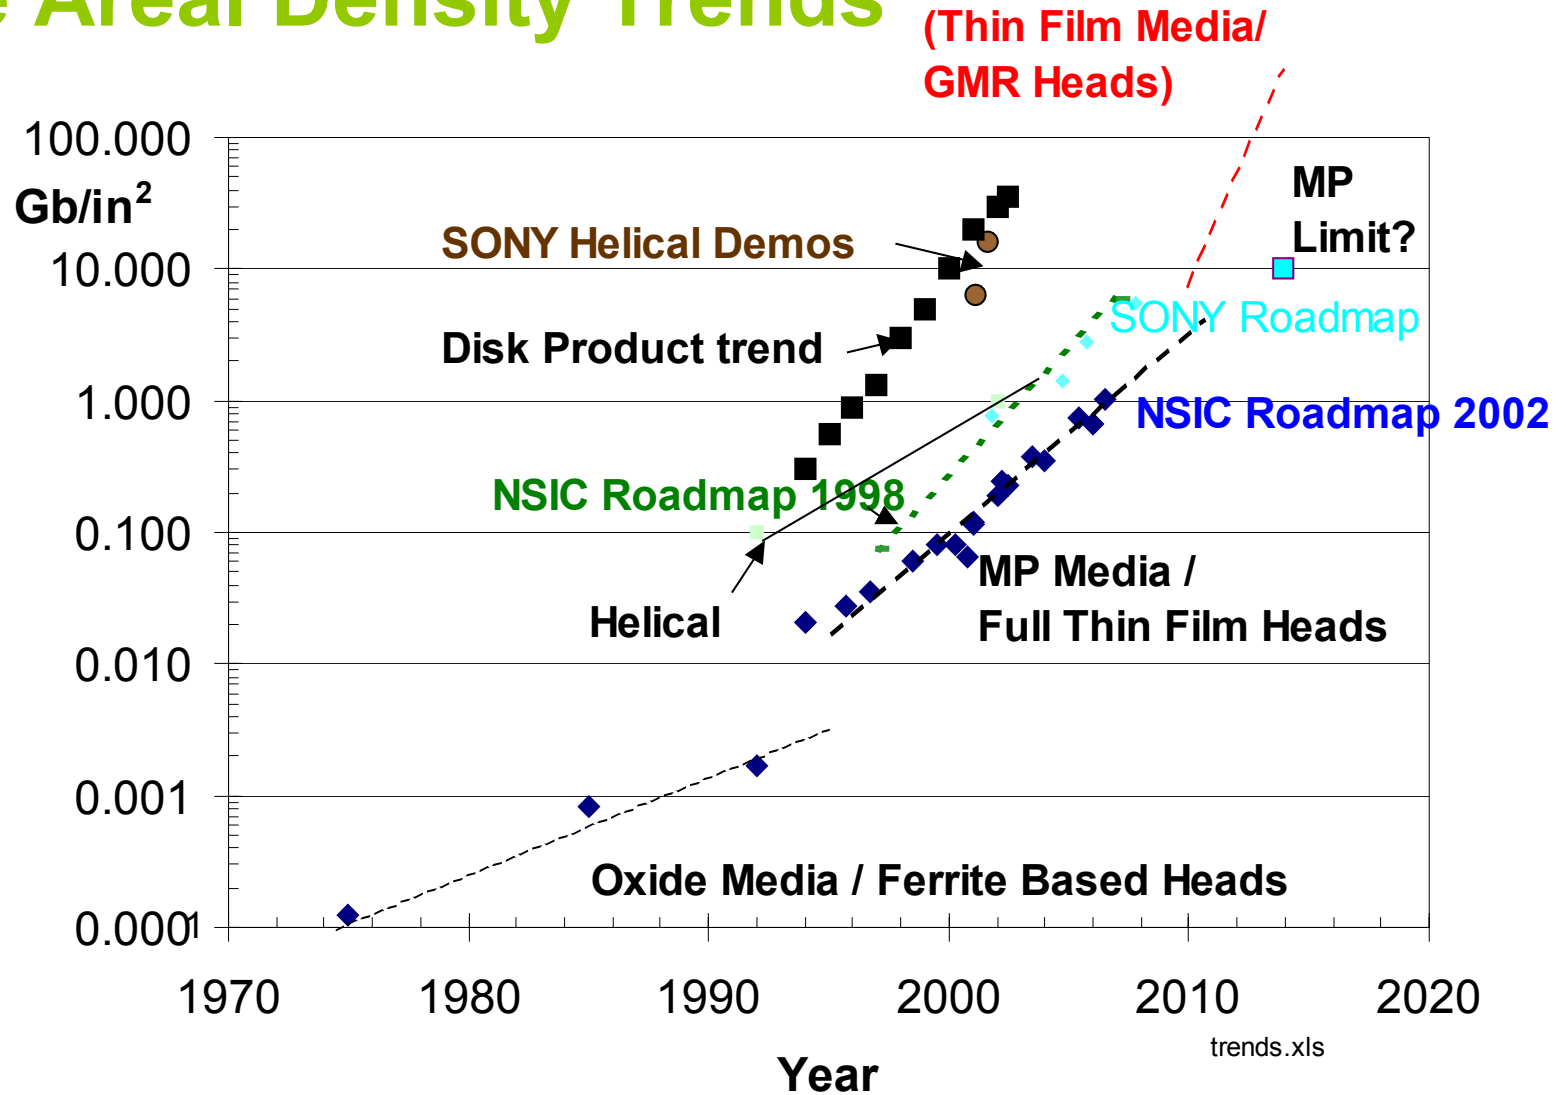

Capacity and Data Rates

$$\textit{Capacity} \sim (t\textit{pi})(b\textit{pi})WL\varepsilon$$

$$\textit{DataRate} \sim n(b\textit{pi})v\varepsilon$$

tpi = track density, ***bpi*** = bit density, ***L*** = length of tape,

W = width of tape, **ε** = efficiency, ***n*** = number of channels,

v = tape speed


2001 NSIC Tape Roadmap

Year	2001	2006	2011	Unit
Tape Cartridge Capacity (User*)	0.1	1	10	TB
Tape Thickness	8.8	5.3	3.8	μm
Approx. Length of Tape	600	1000	1400	m
Linear Tape Track Density	900	2700	9800	TPI
Linear Tape Bit Density	125	250	500	Kbpi
Tape Speed	4	6.5	10	m/s
Data Rate/Channel (Raw)	2.5	8	25	MB/s
Data Rate/Channels (User*)	1.7	6	18	MB/s
* Assumes 15% Servo/Trk Layout OH and 29% ECC/Format OH				
Disk Drive Single Platter Capacity	0.03	0.3	3	TB
Disk Drive Data Rate	74	227	855	MB/s
Capacity Ratio (Tape/Disk)	3.3	3.3	3.3	
Data Rate Ratio (Disk/Tape)	30	29	34	

Technical Challenges Summary

- **Media improvements are key**
 - Particulate
 - ◆ Smaller particles
 - ◆ Thinner substrates
 - ◆ Improved stability
 - Evaporated thin-film
 - ◆ Thinner layers (beyond 30 nm)
 - Sputtered
 - ◆ Best long term potential, but new research needed.
- **Tape paths**
 - Higher speeds with thinner tape
- **Recording channels**
 - New techniques for higher errors (turbo codes)
- **Heads**
 - Technology is place with disk, must apply it to tape (GMR heads)
 - Reduce head media spacing 70nm -> 20nm
- **New environmental issues**


Media Stability

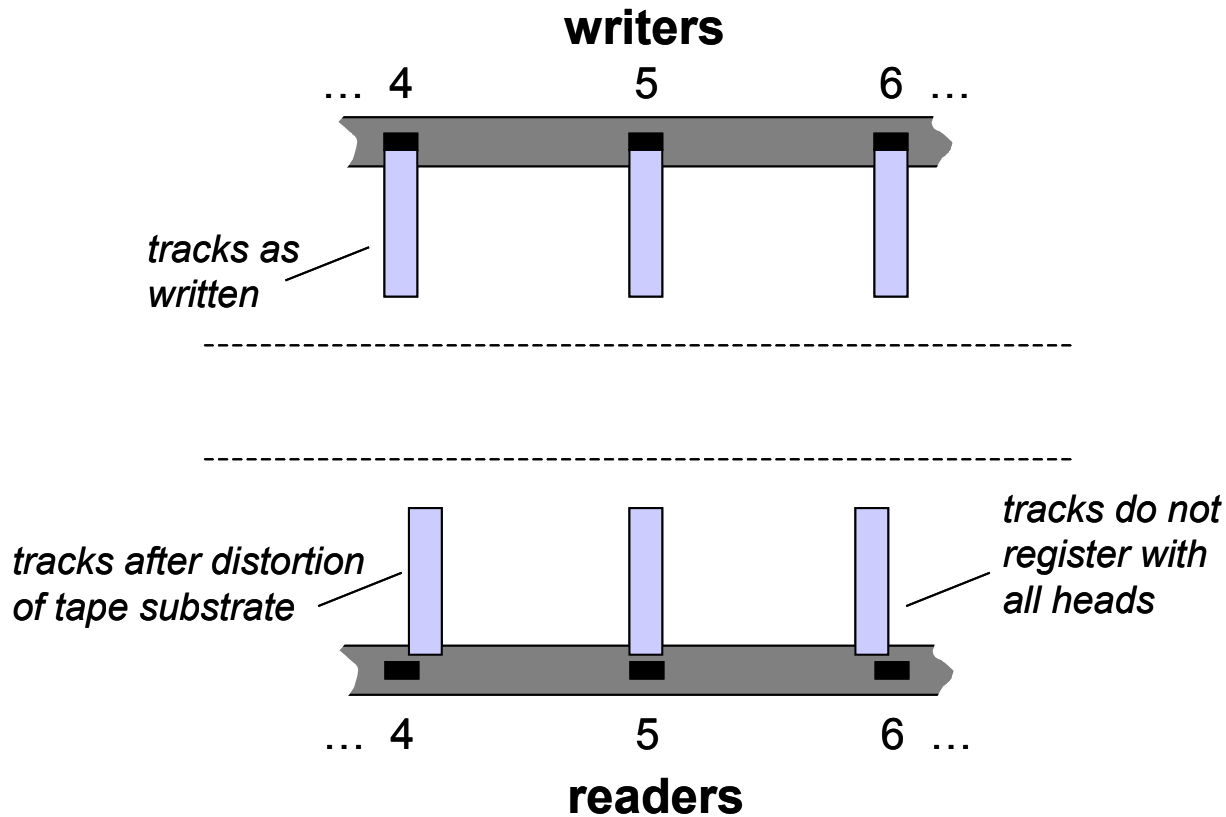

Technical Challenges Summary

- **Media improvements are key**
 - Particulate
 - ◆ Smaller particles
 - ◆ Thinner substrates
 - ◆ Improved stability
 - Evaporated thin-film
 - ◆ Thinner layers (beyond 30 nm)
 - Sputtered
 - ◆ Best long term potential, but new research needed.
- **Tape paths**
 - Higher speeds with thinner tape
- **Recording channels**
 - New techniques for higher errors (turbo codes)
- **Heads**
 - Technology is place with disk, must apply it to tape (GMR heads)
 - Reduce head media spacing 70nm -> 20nm
- **New environmental issues**

Head Media Spacing Challenge

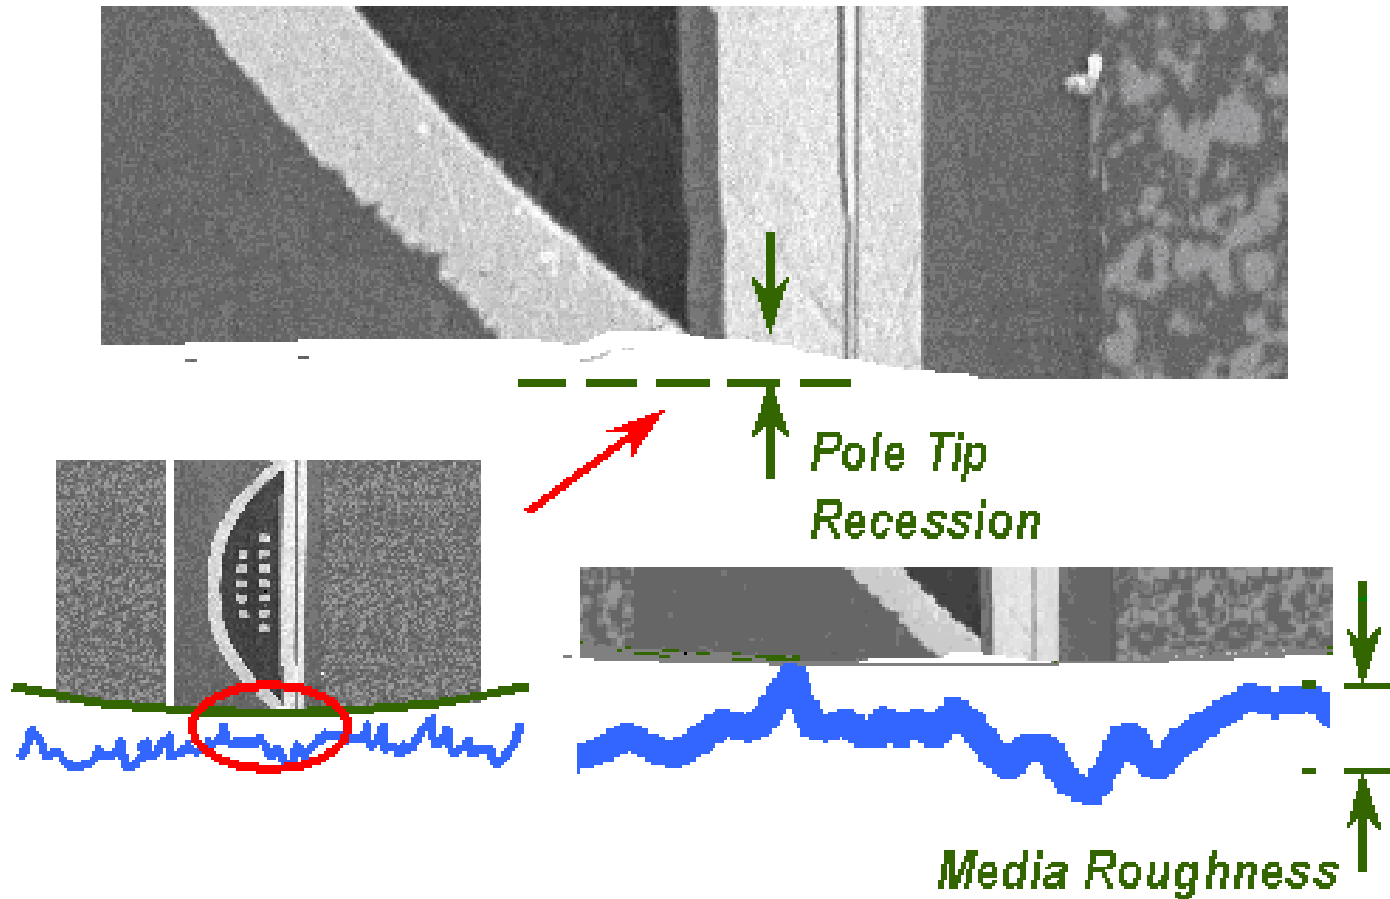

Technical Challenges Summary

- **Media improvements are key**
 - Particulate
 - ◆ Smaller particles
 - ◆ Thinner substrates
 - ◆ Improved stability
 - Evaporated thin-film
 - ◆ Thinner layers (beyond 30 nm)
 - Sputtered
 - ◆ Best long term potential, but new research needed.
- **Tape paths**
 - Higher speeds with thinner tape
- **Recording channels**
 - New techniques for higher errors (turbo codes)
- **Heads**
 - Technology is place with disk, must apply it to tape (GMR heads)
 - Reduce head media spacing 70nm -> 20nm
- **New environmental issues**

Conclusions

- **Tape can continue to remain the cost competitive solution over disk**
 - NSIC roadmap illustrates this competitiveness
 - Roadmap is doable with helical and linear tape demos showing feasibility
- **Disk is expected to slow its capacity growth over the 100% per year trend.**

The NSIC Magnetic Tape Storage Roadmap (February 2002)...

- **Is available for purchase from NSIC:**
 - call Barbara Brittain at: **(858) 279-7230**
 - e-mail: barbara@nsic.org
 - or FAX: **(858) 279-8591**