

UPDATE ON ENERTEC ACTIVITIES IN DATA RECORDING



ENERTEC

**Formerly
Data Acquisition and Recording Division
of Schlumberger Industries**

ENERTEC

ENERTEC : AN AVICORE COMPANY

- **SCHLUMBERGER** wanted to move away from the **military/aerospace business**
- **Acquisition of ENERTEC** is fully in line with **AVICORE** strategy
- **ENERTEC** is profitable with its current level of engineering investment and set of product lines.



AVICORE

- **UK-based Defence and Aerospace Company**
- **Chief Executive : Brian J. Hughes**
- **Share Holders : BZW Private Equity, 3i plc, Management**
- **AVICORE Companies :**
 - W. VINTEN (U.K) Recce, Countermeasures and Video Recording**
 - ENERTEC (France) Telemetry and Recording**
- **Turnover : \$ 65 M**
- **Strategy : double size by organic growth and acquisitions in Europe and go public**

ENERTEC

ENERTEC

- **Same management and location (Vélizy, France) as the previous Data Acquisition and Recording Division of Schlumberger Industries**
- **General Manager : Jean-Paul Vernhes**
- **Employees : 200**
- **Revenues > \$ 30 M**
- **Certified to ISO 9001 and NATO AQAP1**
- **Still represented in the US by Schlumberger Technologies**



ENERTEC PRODUCT LINES

- **Telemetry products and systems for test ranges and flight test centers**
- **Ground control equipment for satellites (TT&C) (House-keeping for telecommunications and TV satellites)**
- **ID1 digital recorders for severe environments and ground applications**
- **DD5 high- end computer peripherals**



ID1 PRODUCT LINE

Series	DV 6410		DV 6450	DV 6420				DV 6820	
Model	DV 6410	DV 6210	DV 6450	DV 6420	DV 6220	DV 6430	DV 6230	DV 6820	DV 6830
Data Rate (Mbit/s)	10-240	5-120	10-240	10-260	5-120	10-260	5-120	60-520	60-520
Environment	Fighter	Fighter	Fighter (ATARS)	Rugge-dized	Rugge-dized	Lab./Industr.	Lab./Industr.	Rugge-dized	Lab./Industr.
Presentation	Main LRU + P/S	Main LRU + P/S	2 LRU's	Rack-mount 7 U	Rack-mount 7 U	Rack-mount 7 U	Rack-mount 7 U	Rack-mount 9 U	Rack-mount 9 U

Bit error rate better than 10^{-10}

Storage capacity : 800 Gbit on D1L

350 Gbit on D1M

Optional built-in-buffer (allows data rates down to zero)

MIL-STD-2179B on request



1997 ID1 TECHNICAL ACHIEVEMENTS

- **520 Mbit/s 8 channel version using the planar capacitive coupler (patent pending)**
 - format compatibility
 - full data rate flexibility with the built-in buffer
- **Wideband analog interface in full production up to 12 MHz (or 2 x 6 MHz)**
 - built-in
 - 24 MHz version prototyped
- **Successful ATARS flight tests**
 - Program office presentation at SPIE 97
 - ID1 format is fully compatible with the harshest environments



ID1 FORMAT ACCEPTANCE

- **Most of the MIL-STD-2179 programs have switched or are switching to ID1 (TSPARS, French Navy, JPL, ..)**
- **ID1 has replaced MIL-STD-2179 in STANAG 7024 (RECCE)**
- **New programs have joined the community (RAPTOR for RAF Recce)**
- **ID1 is now the sole physical format of STANAG 4283 Annex C (Maritime Patrol Acoustics)**



ID1 AND AFTER

- **Success of ID1 is based on**
 - **standardization**
 - **multisource and proven interchangeability**
 - **performance**
 - **growth potential**
- **Limitation of ID1 at 520 Mbit/s is recording time**
- **Enertec has demonstrated feasibility of a 20 micron double density ID1**
- **Enertec is ready to share data with the ID1 community to establish a «double density» ID1 standard**



PROPOSED «DOUBLE DENSITY» ID1 FORMAT

- **Track width is reduced to 22.5 microns**
- **Pitch is also 22.5 microns**
- **TSID consists of 8 tracks for compatibility**
- **Rest of X3 - 175 (ID1) standard remains unchanged**
- **Tape thickness options to be discussed**



KEY FEATURES OF ID1 / DD


- **Data rate up to 520 Mbit/s**
- **BER better than 10^{-10}**
- **Read-after-Write capability**
- **Storage capacity of a minimum of**
 - **1580 Gbit / DIL cassette**
 - **700 Gbit / DIM cassette**
- **Compatible with severe environments**
- **ID1 / DD machines can replay ID1 tapes**




READING ID1 TAPES WITH DD HEADS



ANSI ID1 FOOTPRINT (45 μm pitch)

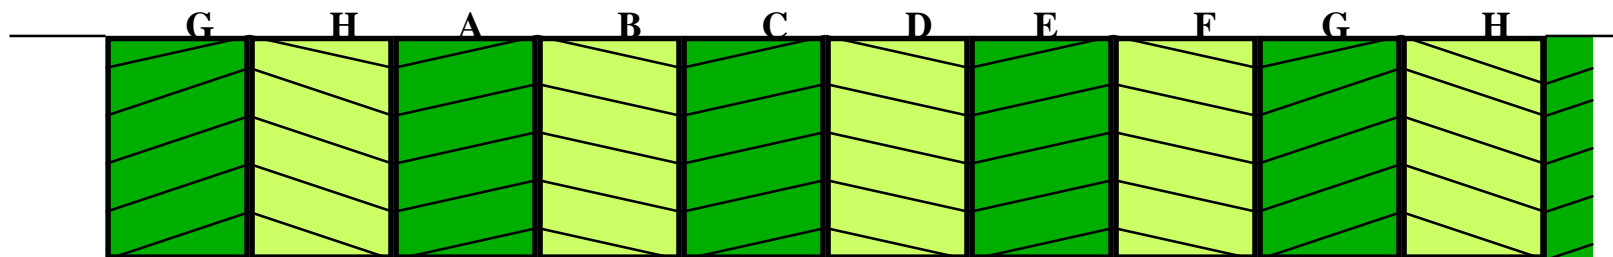

DOUBLE DENSITY FOOTPRINT (22.5 μm pitch)

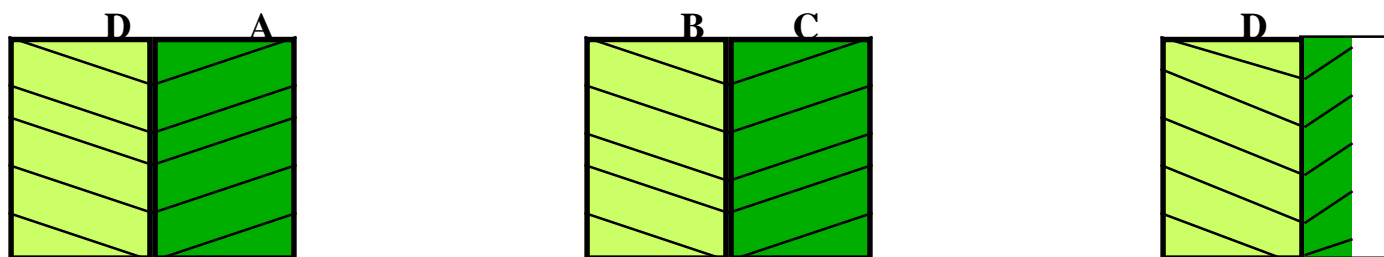

SINGLE DENSITY REPRODUCED VS DOUBLE DENSITY




DD5 FORMAT

- **Military and aerospace markets are not the only ones where data rate and storage capacity requirement are growing**
- **General computer peripheral applications start to exceed the capabilities of the existing technologies**
- **Enertec has decided to derive a digital tape drive from the highest performance digital broadcast VTR of the market (Panasonic D5)**
- **D5 is component (4.2.2) 10 bit recording without compression**
- **In DD5, the video sectors are replaced by digital data**

ENERTEC

D5 FOOT-PRINT AND FEATURES

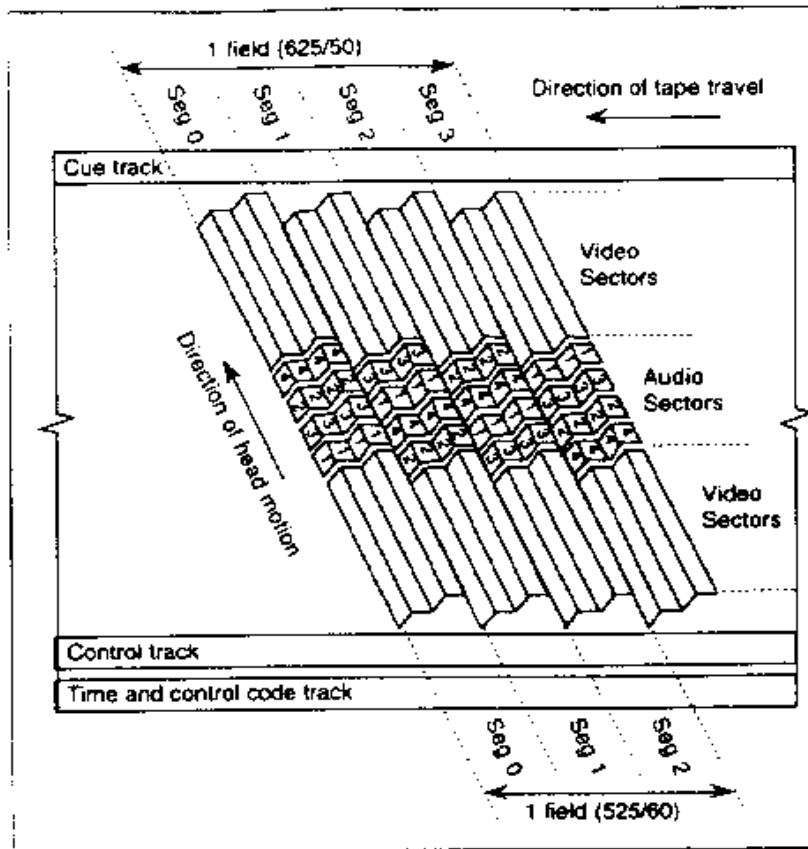

- Track width : 20 microns
- Azimuth : +/- 20 degrees
- Track Angle : 4.9 degrees
- Linear density : ~90 kbp
- Tape thickness : 14 or 11 microns
- Piezoelectric actuator tracking

ENERTEC

DD5 DV5830 MASS STORAGE CASSETTE DRIVE

- **Based on a D5 tape deck and video interface controlled by a PCI board with SCSI interface**
- **Sustained transfer rate up to 28 MB/s inclusive of retries**
- **Max. uncompressed storage capacity per cassette : 160 GB**
- **Standard SCSI 2 / ULTRA SCSI interface and commands compatible with the standard tape drive softwares**
- **Bit error rate better than 10^{-15}**
- **Search faster than 700 MB/s**
- **19'' rack mount chassis, 7 units high**

ENERTEC

DR5800 ROBOT

- **Accommodates**
 - **1 or 2 DV5830 DD5 drives**
 - **up to 84 medium cassettes**
 - **up to 42 large cassettes**
 - **or a mix**
- **Provides a total storage capacity exceeding 6 terabytes**
- **Bar-code identification (standard robot commands)**
- **Compatible with most archive management softwares**



CONCLUSION

- **Enertec strongly believes in the growth potential of magnetic tape for high data rate mass storage**
- **Progress in solid state technology will result in more performant buffers and increased capabilities for the tape drives**
- **Enertec is ready to contribute actively to the bright future of tape recording**
- **Long life to **T**ape to **H**ead **I**nterfaces**

